

GROUND ZERO
ULTRA PURE SQ AMPLIFIER



GROUND ZERO®
GERMAN ENGINEERING

2023/2024

GROUND ZERO®

GERMAN ENGINEERING

Sophisticated car audio since 1995

The Rise of the GROUND ZERO Company

GROUND ZERO has been founded back in 1995 by Karl Felix Lautner distributing car audio products "Made in USA" and introduced the revolutionary subwoofers of GZ Engineering USA to the European market in 1997.

The following years, the German company took over the European trademark rights of "GROUND ZERO" and started developing market specific products.

Finally, 2003 the GROUND ZERO GmbH took over all global trademarks from the discontinued US company and expanded the distribution to customers worldwide.

Today, more than 400 sophisticated audio products developed and designed at the GROUND ZERO in-house engineering department are available in more than 80 countries globally.

Ensuring Superior Quality of GROUND ZERO Products

The GROUND ZERO product range includes speakers, subwoofers, amplifiers and further digital audio equipment for enthusiastic customers. Satisfying high demands and quality, Ground Zero carefully monitors every step of the production starting at the development using top-notch tools and highly accurate measurement equipment such as the laser controlled KLIPPEL® system to optimize every detail.

Precise amplifier measurement equipment by Audio Precision® results in power ratings corresponding to the acknowledged CEA 2006-A standard. Without exceptions, every single product is evaluated by extensive testing and quality control prior to its final production release and market launch.

On the Winner's Side with GROUND ZERO

Many international car audio journals confirm the highest product quality impressing even sophisticated customers. However, the most convincing evidence is provided by the huge amount of GROUND ZERO equipped cars worldwide.

With an outstanding audio performance, they succeed to be part of the winner's circle of European and World SQ and SPL Championships every season.

REFERENCE ULTRA	4
REFERENCE	8
PLUTONIUM	10
NUCLEAR	14
URANIUM	18
HYDROGEN	24
RADIOACTIVE	28
TITANIUM	34
IRIDIUM	38
COMPETITION	44
COMPETITION PRO	44
MARINE	51
DSP	52
CAR SPECIFIC	56
Damping	62
Accessories	64
Headphones	69
Merchandise	70
Product Specifications	73



REFERENCE ULTRA SERIES

„ul·tra“

Beyond the range of limits,
Beyond the ordinary,
Beyond the others.

High-End Performance

After collecting detailed experience in SQ performance and general in-car audio reproduction for more than 25 years during the development of loudspeakers, subwoofers and amplifiers for highly demanding customers and having launched a wide range of car audio products used for sound quality competitions all over the world, GROUND ZERO has started to take advantage of all these gathered skills devising a very new and super high-end product line called the ULTRA series.

Not yet launched but though obviously, this line will set once more a remarkable milestone in car audio history. For the most sophisticated demands, GROUND ZERO introduces an extraordinary two-channel amplifier and matching loudspeakers in 2022! ULTRA series products are developed by highly attentive engineers from England, Sweden and Germany creating products for the most demanding customers without accepting any compromise in overall quality and SQ performance.



GZ ULTRA A-2
 Ultra-high-end 2-channel amplifier
 S/N ratio > 120 dBA
 2x 200 / 330 / 450 W @ 4 / 2 / 1 Ω
 Full-symmetrical dual-mono design
 Made in England


Objects designated as high-end are assigned to this category based on the assumption that they belong to the top segment of a respective product group and are generally characterized by unusual, exceptional and exclusive features and a very high manufacturing quality.

In our opinion, the concept of real high-end is defined much more extensively by experiencing feelings and the resulting impression when listening to your favourite music using such devices. Therefore, it was the only, constant and uncompromising goal in the development of the ULTRA series to achieve that tingling sensation that goes along with the goosebumps when the ear lets us perceive things that go beyond the spectrum that can only be recorded with a test microphone.

The results of three years of development, uncountable listening sessions, comparisons, tuning and testing led to the GZ ULTRA A-2, the most advanced analogue amplifier on the market uniting perfectly selected components reduced to the minimum of distractingly influencing aspects by the overall and undisputed skills of one of the best-known and famous amplifier engineers from England bringing more than 30 years of experience into this design while creating a masterpiece of an amplifier, matching our and everybody's most sophisticated expectations and finally, worth to be called ultra-high-end.

Features:

- Ultra-high-end analogue 2-channel amplifier
- Made in England
- Full-symmetrical dual-mono layout design
- Swiss-made high-end ELMA selector switches
- Two-step BIAS selector
- Four-step input sensitivity selector
- Potentiometer-less and OPA-less direct signal path
- Direct and short signal path
- GZ-exclusive MUNDORF® audio capacitors
- Nichicon (Japan) & WIMA® (Germany) components
- High-end SANKEN® Darlington power transistors
- Precision-winded transformer coils
- Rhodium RCA sockets
- Tinted-acrylic bottom plate
- Switchable white pcb illumination
- High-efficient extruded aluminum heat sink
- Ready for custom liquid-cooling (available separately)
- Documented final technical inspection
- Wooden box packaging

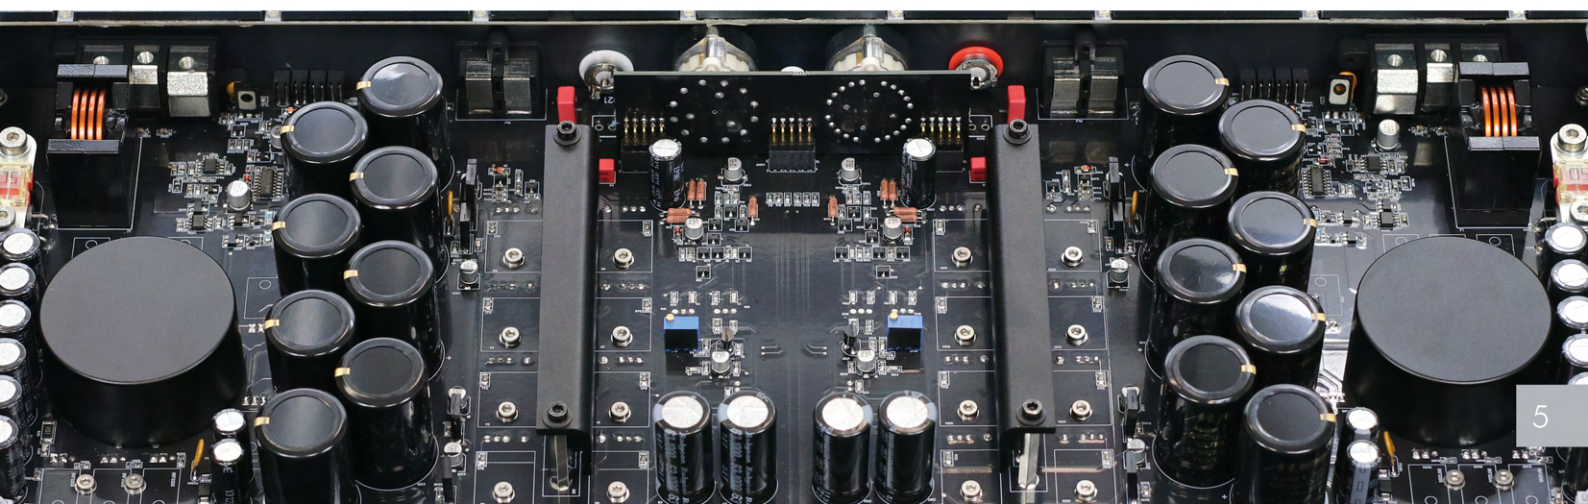



GZ ULTRA T-30
Ultra-high-end soft dome tweeter
100 W RMS / 150 W max
Freq. response 1000 Hz – 26 kHz
Resonance frequency 500 Hz



GZ ULTRA M-80
Ultra-high-end midrange speaker
Power handling TBA
Freq. response TBA
Resonance frequency TBA

Sound is something very subjective. Everyone perceives it differently because each ear also hears differently. Consequently, it is hardly possible to predict how the audio playback will be perceived individually. For this reason, it is difficult to develop a so-called perfect speaker. Rather, the aim of the development is to avoid any error, no matter how small it could be, caused by the loudspeaker. Above all this, the interaction of several loudspeakers used for the entire audible frequency range, and even beyond that, with the signal source and the connected power amplifier is decisive for the result and determines whether the music touches the listener emotionally or not.


Features:

- Ultra-high-end 30 mm / 1.18" soft dome tweeter
- Tightly-tolerated technical parameters
- Precision-coated textile diaphragm
- Dual-piece neodymium motor
- Vented voice coil former reducing distortion
- Lightweight CCA voice coil improving efficiency
- Particular dome damping balancing pressure
- Machined aluminum chamber with wave diffuser
- ULTRA-grey color anodized housing
- Flexible lead wires increasing power handling
- GZ-design wave-guide face plate
- GZ-design mounting ring & hexagon style grill
- Gold-plated multiway terminal
- Documented final technical inspection
- Wooden box packaging / in matching pairs

A sophisticated audio experience requires a passionate sound reproduction in all acoustical areas. The most important frequency area to listen to voices and audiophile instruments lays between the midwoofer and tweeter. To reproduce sound with the same acoustical colour at the full audio spectrum, the midrange speaker must follow the same design language like the loudspeakers that surrounds him. The cone is made out of a light but rigid material that allows the speaker to produce this sophisticated audio experience on the highest level. With a linear motor and a uncongested basket design, this midrange loudspeaker fills the acoustical gap between the Ultra-high-end midwoofer and tweeter with dignity.

Features:

- Ultra-high-end 80 mm / 3.15" midrange speaker
- Tightly-tolerated technical parameters
- Lightweight cone
- High-excursion linear moving rubber surround
- High-grade neodymium motor
- Optimized motor and voice coil ventilation
- Airflow-optimized aluminum basket
- Documented final technical inspection
- Wooden box packaging / in matching pairs
- GZ-design mounting ring & hexagon style grill

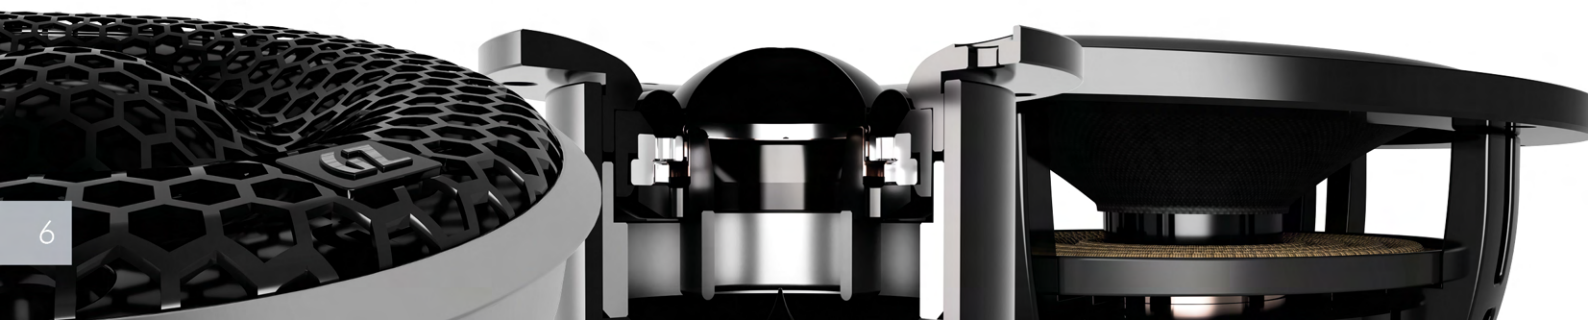



GZ ULTRA K-165
 Ultra-high-end midwoofer
 100 W RMS / 160 W max
 Freq. response 45 Hz – 5 kHz
 Resonance frequency 43 Hz
 Made in Germany



GZ ULTRA 165-GRILL

For perfect custom installations and decent visible appearance, GROUND ZERO offers a pair of GZ-design hexagon style protection grills and massive machined aluminum mounting rims with a polished surface matching perfectly the GZ ULTRA K-165 midwoofers.

Design follows function. In fact, the design of the ULTRA K-165 midwoofer is way more than just imposing cosmetics. The unique basket consists of a set of machined aluminum parts providing maximum stability for the moving parts but showing no disturbing influences owing to an air-flow optimized shape of the spokes. Two layers of carbon-fleece, impregnated with a polymeric resin and a layer of special damping in-between are united under high temperature and pressure resulting in a high-strength, exceptionally torsional-rigid but though extremely lightweight sandwich cone. Together with a powerful high-grade neodymium motor that's the perfect basis for the intended purpose of the midwoofer driver, sounding and performing unrivaled great.

Features:

- Ultra-high-end 165 mm / 6.5" midwoofer
- Tightly-tolerated technical parameters
- Lightweight carbon-fleece sandwich cone
- High-excursion linear moving rubber surround
- High-grade neodymium motor
- Vented voice coil former reducing distortion
- Copper wire voice coil increasing power handling
- GZ-design basket from machined aluminum parts
- Optimized motor and voice coil ventilation
- Airflow-optimized aluminum cast spokes
- Flexible spider-woven lead wires
- Documented final technical inspection
- Wooden box packaging / in matching pairs
- GZ ULTRA 165-GRILL protection grills (available separately)





REFERENCE SERIES

Pure High-End Sound Quality

The EISA awarded REFERENCE series components obtain the highest attention and care during a long-lasting development. Without any compromise, each component is selected from the best ones available on the market. Highest production quality and the most accurate supervision of every single part ensure not less than perfect performance, ultimate sound quality and workmanship for the most demanding applications. Emphasizing the high-end status of the REFERENCE series products, each amplifier, speaker and subwoofer is finally certified by GROUND ZERO's in-house quality department and delivered in a classy, logo-branded wooden box handmade in Germany.

Model specifications

General information



GZPA Reference 4PURE-SQ
High End Pure SQ 4-channel amplifier
4x 150 / 270 / 425 W @ 4 / 2 / 1 Ω
Bridged mode 2x 1000 W max @ 2 Ω
Symmetrical dual 2 channel design



GZPA Reference 2PURE
High End Pure SQ 2-channel amplifier
2x 420 / 750 / 1150 W @ 4 / 2 / 1 Ω
Bridged mode 1x 2700 W max @ 2 Ω
Symmetrical dual mono design

The designation of the REFERENCE 2PURE and REFERENCE 4PURE-SQ amplifiers reveal the essential idea behind: Pure Sound Quality. These two models waive all kind of filters and unnecessary controllers influencing the signal. Removing these parts leads to a circuit layout with short and direct signal flow from the input sockets to the speaker terminals. The components used for the REFERENCE amplifiers have been selected with highest care opposing any compromises and have partly been engineered exclusively for the REFERENCE PURE models.

The upgraded 4-channel SQ amplifier has been improved using some latest electronical parts available on the market. These changes allow a wider BIAS range setting increasing the ambience of the music reproduction. The power supply has been separated electrically and physically leading to an absolutely symmetrical layout of the circuit that is the basis for these dual-mono and dual-stereo amplifiers. The output power of up to 1150 Watts per channel provides another contribution to the precise and detailed REFERENCE sound, punchy and dynamic, warm and enjoyable.

Common features:

- High-end SQ amplifiers
- Variable BIAS setting
- Symmetrical design
- Separated L & R gain controls
- No filters – PURE and direct sound
- Rhodium RCA sockets
- Audio-optimized ALPS® potentiometers
- High-end SANKEN® power transistors
- GZ-exclusive MUNDORF® audio capacitors
- White pcb illumination
- Tinted-acrylic bottom plate
- Wooden box packaging

REFERENCE Subwoofer

Model specifications

General information




GZPW Reference 250
High End 250 mm / 10" subwoofer
500 W RMS / 2x 2 Ω
31.3 Hz / Qts 0.50
VAS 36.5 L / 1.29 ft³



Made in Germany

For most accurate bass performance, the unique REFERENCE subwoofer comes with a lot of particular solutions, such as a number of linearization parts added to the magnet system optimizing the impedance and eliminating distortion. This exceptional subwoofer has been optimized to perform in small enclosures.





PLUTONIUM SERIES

High-End Experience

Products belonging to the PLUTONIUM series are suitable for ultimate sound quality, world record SPL levels or even extreme low frequency response. To achieve one of these targets, exceptional materials and technologies are applied during the development.

The technical, electrical and mechanical skills of the resulting products stand out continuously at worldwide SPL and SQ competitions. The unique 15" neodymium driven subwoofer sets SPL level benchmarks while the SQ amplifiers have been awarded by EISA representing numerous car audio test magazines from all around the world for as best performing amplifier of the year.

Model specifications

GZPA 2SQ

High performance SQ 2-channel amplifier
 2x 175 / 315 / 500 W @ 4 / 2 / 1 Ω
 Bridged mode 1x 1000 W max @ 2 Ω
 High-resolution response



GZPA 4SQ

High performance SQ 4-channel amplifier
 4x 125 / 225 / 350 W @ 4 / 2 / 1 Ω
 Bridged mode 2x 700 W max @ 2 Ω
 High-resolution response



General information

The PLUTONIUM series contains two sound quality amplifiers simply leaving no wishes unfulfilled.

The 4-channel version has been awarded by the EISA organization as the world's best in-car amplifier 2018/2019.

Common features:

- Shielded dual power supply
- High-end sound quality amplifier
- Discretely constructed MOS-FET amplifier section
- 1-ohm stable stereo / 2-ohms stable in bridged mode
- Smoothly variable BIAS adjustment
- Variable input sensitivity
- Capsulated potentiometers
- Wide range high pass and low pass filter
- Filter range multiplication switch (x10)
- High resolution frequency range (10 Hz – 50 kHz)
- Soft start delay
- Operation and protection indicator
- Start-Stop capability (9 -16 Volt)
- Overheat and short circuit protection
- Low distortion Burr-Brown OPA2134PA operation amps
- Exclusively manufactured Mundorf Mcap® capacitors
- Solid and high-efficient black anodized heatsink
- White illuminated lasered glass logo plate
- Winner of the German Design Award 2020 (PA 4SQ)



General information

The all-new PLUTONIUM series loudspeaker components have been developed for highly sophisticated sound quality requests.

Lightweight but stable aluminum-ceramics cones for the midwoofer and midrange ensure highest dynamic performance in combination with the stainless-steel housed silk dome tweeter or full range speaker which are handmade in Germany. The drivers are available separately for individual 2-way or 3-way full active SQ setups.

Common features:

- High-end speakers for full active SQ applications
- GZPT and GZPF speakers handmade in Germany
- Resonance free aluminum cast basket
- High-tech ceramic-coated aluminum cone
- Impedance linearizing copper caps
- Powerful Klippel® optimized hybrid motors
- High-dynamic audio reproduction
- Stainless steel tweeter & full range speaker housing



GZ ULTRA 165-GRILL

Machined & polished aluminum mounting rim including GZ-design hexagon style grill and logo plate (1 pair)

Model Specifications

GZPC 165.2SQ-ACT

High-end 2-way set for active applications

Freq. response 30 – 30000 Hz

Components:

GZPT 28SQ

GZPK 165SQ-C



GZPC 165.3SQ-ACT

High-end 3-way set for active applications

Freq. response 30 – 30000 Hz

Components:

GZPT 28SQ

GZPM 80SQ-C

GZPK 165SQ-C



PLUTONIUM Loudspeaker components



GZPT 28SQ

High-end 28 mm / 1.1"

silk dome tweeter

100 W RMS / 150 W max



Made in Germany



GZPF 40SQX

High-end 40 mm / 1.6"

full range speaker

50 W RMS / 80 W max



Made in Germany



GZPM 80SQ-C

High-end 80 mm / 3.15"

midrange speaker

70 WRMS / 110 W max



GZPK 165SQ-C

High-end 165 mm / 6.5"

midwoofer

140 WRMS / 200 W max

PLUTONIUM SQ Subwoofer

General information

GROUND ZERO engineers and product designers were concentrated on developing this amazing high-end sound quality subwoofer. Optimized for small sealed enclosures for highest audiophile expectations, this 25 cm / 10" SQ model is now available.

Features:

- 25 cm / 10" high-end sound quality subwoofer
- Klippel® optimized (for sealed enclosures)
- Anodized aluminum cone and dust cap
- Solid aluminum cast basket
- Rubber surround
- Copper wire voice coil
- Aluminum cast fastening rim/grill included

Model Specifications

GZPW 10SQ

High-end sound quality subwoofer

400 W RMS / 2x 2 Ω



Aluminum cast fastening rim and grill included

Model specifications

GZPW 15NEO-SPL-LTD
High power SPL subwoofer
3000 W RMS / 10000 W SPL / 2x 1 Ω

General information

GROUND ZERO introduced the ultimate SPL subwoofer for competition use with the PLUTONIUM series neodymium-driven top-of-the-line 38 cm / 15" model. Starting from the market release, this subwoofer has set benchmarks in all SPL competitions around the world.

Features:

- 38 cm / 15" high power SPL subwoofer
- Multi-piece neodymium motor
- Klippel® optimized
- Carbon fiber mixed cone
- SPL U-shape surround
- Solid aluminum cast basket
- 100 mm / 4" flat wire voice coil
- 4-layer Nomex spider
- Carbon fiber dust cap



19 NEO MAGNET MOTOR VERSION
LIMITED


PLUTONIUM XXmax Subwoofer
Model specifications

GZPW 15XXmax
High-power long stroke subwoofer
6000 W RMS / 2x 1 Ω

General information

The PLUTONIUM series XXmax subwoofer follows in the footsteps of the legendary GZPW 15XQ setting a new benchmark for cone excursions. Using only components with extremely high-power handling and an even stronger ferrite motor than its Xmax predecessor.

Features:

- 38 cm / 15" high-power long stroke subwoofer
- Klippel® optimized
- Solid Aluminum cone and dust cap
- Long stroke foam surround
- Solid aluminum cast basket
- 100 mm / 4" aluminum flat wire voice coil
- 4-layer Nomex spider





NUCLEAR SERIES

Ultimate Performance

With several particular features of the high-end PLUTONIUM series, the NUCLEAR series contains amazingly sounding new midwoofers with high-tech cones as well as a silk dome tweeter with a solid aluminum housing, each at a remarkable price-performance ratio. Moreover, there is a number of extraordinary power capable subwoofers available, suitable for high-level audio setups as well as for raw SPL competition use.

Model specifications

General information



GZNC 165.2SQ-ACT
 High-tech 2-way set for active applications
 Freq. response 40– 25000 Hz
 Components:
 GZNT 28SQ
 GZNK 165SQ-K


The all-new NUCLEAR series loudspeaker components have been developed together with the latest PLUTONIUM models. High-tech Kevlar® cones used for the midwoofer and upcoming midrange driver provide clear and dynamic audio reproduction. Both can be combined individually to a 2-way or 3-way full active SQ setup with the precision coated silk dome tweeter.

Common features:

- High-tech speakers for full active SQ applications
- Resonance free aluminum cast basket
- High-tech Kevlar® cones
- Impedance linearizing copper caps
- Powerful Klippel® optimized hybrid motor
- Clear and dynamic audio reproduction
- Precision coated silk dome tweeter
- Solid aluminum housing with GZ design fastening rim



GZNC 165.3SQ-ACT
 High-tech 3-way set for active applications
 Freq. response 40 – 25000 Hz
 Components:
 GZNT 28SQ
 GZNM 80SQ-K
 GZNK 165SQ-K



GZ ULTRA 165-GRILL
 Machined & polished aluminum mounting rim including
 GZ-design hexagon style grill and logo plate (1 pair)

NUCLEAR Loudspeaker components



GZNT 28SQ
 High-tech 28 mm / 1.1" silk dome tweeter
 Solid aluminum housing
 90 W RMS / 140 W max



GZNM 80SQ-K
 High-tech 80 mm / 3.15" midrange speaker
 70 W RMS / 110 W max



GZNK 165SQ-K
 High-tech 165 mm / 6.5" midwoofer
 130 W RMS / 190 W max

NUCLEAR SPL Subwoofer

General information	Model specifications
Taking the time to launch a worthy successor for the legendary NUCLEAR SPL subwoofers, GROUND ZERO developed two extraordinary power capable models with huge SPL output for daily use and SPL competition purpose. This new model is available in a double 2-ohms and a double 1-ohm version. Common features: ◦ High-power SPL subwoofer ◦ Klippel® optimized ◦ Reinforced paper cone and dust cap ◦ Long stroke foam surround ◦ Solid aluminum cast basket ◦ 75 mm / 3" aluminum wire voice coil ◦ 4-layer Nomex spider	GZNW 30SPL-D1 High power SPL subwoofer 3000 W RMS / 6000 W SPL / 2x 1 Ω GZNW 30SPL-D2 High power SPL subwoofer 3000 W RMS / 6000 W SPL / 2x 2 Ω  GZNW 38SPL-D1 High power SPL subwoofer 3500 W RMS / 7000 W SPL / 2x 1 Ω GZNW 38SPL-D2 High power SPL subwoofer 3500 W RMS / 7000 W SPL / 2x 2 Ω 

NUCLEAR NEO-SPL Subwoofer

General information	Model specifications
Using carbon fiber instead of pressed paper increases the maximum amount of power usable for the EXTREME version of the NUCLEAR NEO-SPL subwoofer. Features: ◦ 38 cm / 15" high power SPL subwoofer ◦ Multi-piece neodymium motor ◦ Klippel® optimized ◦ U-shape high roll SPL surround ◦ Solid aluminum cast basket ◦ 75 mm / 3" 8-layer aluminum voice coil ◦ 2x 2 layer Nomex spider	GZNW 15NEO-EXTREME High power SPL subwoofer Coated carbon-fiber cone 3000 W RMS / 6000 W SPL 2x 1 Ω 

Model specifications

GZNW 12X-D2
High performance long excursion subwoofer
2000 W RMS / 2x 2 Ω


General information

With GZNW 12X-D2 GROUND ZERO resurrects an old legend. Combining the looks of the legendary blue GZNW 12X with modern subwoofer technology and years of experience, GROUND ZERO creates the long awaited successor.

Features:

- High performance long excursion subwoofer
- Klippel® optimized
- Aluminum cone
- High-roll surround
- Solid blue aluminum cast basket
- 75 mm / 3" 4-layer CCA round wire voice coil
- 4-layer polycotton spider
- Aluminum dust cap

NUCLEAR SPL-Xflex Subwoofer
Model specifications

GZNW 12SPL-Xflex
High performance SPL subwoofer
2500 W RMS / 4500 W SPL / 2x 1 Ω


General information

Paired with the yellow colored surround stitch and an ultra-solid as well as perfectly ventilated aluminum cast basket, this SPL-Xflex subwoofer with powerful ferrite motor is predestined for high level audio setups. The particular Xflex high roll surround combines high excursion capability with flexibility for low frequency music reproduction.

Features:

- High performance SPL music subwoofer
- Klippel® optimized
- Reinforced paper cone
- SPL high-roll Xflex surround
- Solid aluminum cast basket
- 75 mm / 3" CCA round wire voice coil
- 4-layer progressive spider
- IMPP dust cap with 3D structure logo

NUCLEAR Xmax Subwoofers
Model specifications

GZNW 12Xmax
High performance long stroke subwoofer
3000 W RMS / 2x 1 Ω

GZNW 15Xmax
High performance long stroke subwoofer
4000 W RMS / 2x 1 Ω


General information

The NUCLEAR line Xmax subwoofers share some of the features of the PLUTONIUM series top subwoofer and expand the line of high excursion models providing excellent low bass performance.

Common features:

- High power low bass subwoofers
- Klippel® optimized
- Aluminum cone and dust cap
- Long stroke compound surround
- Solid aluminum cast basket
- 75 mm / 3" CCA round wire voice coil
- 4-layer Nomex spider



URANIUM SERIES

Amazing Sound Quality

Each product of the URANIUM series has been developed carefully to fulfill the demands of music enthusiasts with high audiophile expectations at a reasonable price level. Applying all of Ground Zero's sound quality competition experience while tuning the product details carefully, results in emotional and amazing audio reproduction. The distinguished amplifiers point out the main purpose by their designation: SQ beyond the average!



General information

The brand-new URANIUM SQ amplifier generation point out the main purpose by their designation. Many particular features, e.g., Darlington array power transistors and BURR-BROWN® operational amps and the wide-range BIAS control provide an amazing SQ performance. Highly accurate and variable wide-band filters form the basis for various combinations of passive or even full-active loudspeaker setups.

Common features:

- Class A/B SQ amplifier
- Adjustable BIAS control
- Latest BURR-BROWN® operational amplifiers
- Darlington power transistors
- High-end audio capacitors
- 1-ohm load stable in stereo mode (GZUA 2SQ)
- Variable high pass & low pass filters
- Stabilized power supply
- Ready for Start/Stop vehicles
- Re-designed noble & stylish heatsink
- Gold-plated terminals

Variable BIAS control

The BIAS setting affects the operation mode of an amplifier. Pure class A amplifiers sound warm creating a pleasant atmosphere. Compared to that, class A/B amplifiers provide a more direct and dynamic sound. The BIAS setting of the URANIUM SQ amplifiers is therefore adjustable within a wide range to match the customers requirements.

Model specifications

GZUA 2SQ

Class A/B 2-channel SQ amplifier
2x 170 / 300 / 450 W @ 4 / 2 / 1 Ω
1x 1080 W max @ 2 Ω in bridged mode
Wired remote control included



GZUA 4SQ

Class A/B 4-channel SQ amplifier
4x 115 / 185 W @ 4 / 2 Ω
2x 440 W max @ 4 Ω in bridged mode



GZUA 6SQ

Class A/B 6-channel SQ amplifier
4x 110 / 160 W + 2x 150 / 270 @ 4 / 2 Ω
2x 380 + 650 W max @ 4 Ω in bridged mode



Model specifications

General information



GZUC 165.2SQ
SQ 2-way component speaker system
140 W RMS / 230 W max
Freq. response 40 – 25000 Hz

GZUC 165.2SQ-ACT
SQ 2-way set for full active applications
Freq. response 40 – 25000 Hz
Components:
GZUC 165SQ
GZUT 28SQX



GZUC 165.3SQ
SQ 3-way component speaker system
160 W RMS / 250 W max
Freq. response 40 – 25000 Hz

GZUC 165.3SQ-ACT
SQ 3-way set for full active applications
Freq. response 40 – 25000 Hz
Components:
GZUC 165SQ
GZUM 55SQ
GZUT 28SQX

Using particular materials for cones and running hours of accurate tuning during the development, these speakers provide an amazing sound quality performance.

Apart from the separately available components, GROUND ZERO offers some models compiled to high quality passive speaker systems.

Common features:

- High-tech speakers for ambitious SQ-applications
- GZ design aluminum cast basket
- High-efficient neodymium motor
- Black aluminum cone
- Rubber surround
- 28 mm / 1.1" coated silk dome tweeter
- 55 mm / 2.17" silk dome midrange (3-way only)
- Variable 12 dB/oct crossover
- Klippel® optimized ferrite and neodymium motors
- GZ- design hexagon style protection grill



GZTH 25-28B
Optional tweeter housing for GZUT 28SQX

URANIUM SQ Loudspeaker components



GZUT 28SQX
SQ 28 mm / 1.1" silk dome tweeter
80 W RMS / 130 W max
Freq. response 2500 – 25000 Hz



GZUM 55SQ
SQ 55 mm / 2.17" silk dome midrange
90 W RMS / 150 W max
Freq. response 500 – 11000 Hz
Included aluminum ring for increased mounting stability



GZUF 60SQ-A
SQ 60 mm / 2.36" full range speaker
50 W RMS / 80 W max
Freq. response 300 – 20000 Hz



GZUM 80SQ
SQ 80 mm / 3.15" midrange
50 W RMS / 80 W max
Freq. response 200 - 6000 Hz



GZUX 165.3SQ
SQ 3-way passive crossover (1 pair)



GZUX 165.2SQ
SQ 2-way passive crossover (1 pair)



GZUC 165SQ
SQ 165 mm / 6.5" midwoofer
120 W RMS / 180 W max
Freq. response 40 – 3500 Hz

General information

Each high-performance SQ speaker setup requires an equivalent low frequency extension. GZUW SQ-D2 subwoofers of the URANIUM series match perfectly and offer various options for individually calculated custom enclosures.


Common features:

- SQ subwoofers
- Klippel® optimized
- Pressed and coated paper cone
- Audiophile Polycot spider
- U-shape foam surround
- Resonance-free aluminum cast basket
- 50 mm / 2" copper voice coil
- Screw terminals

Optional accessories:

GZPG 250B

Solid hexagon style protection grill for GZUW 10SQ-D2



Model specifications

GZUW 8SQ-D2
High-quality SQ subwoofer
300 W RMS / 2x 2 Ω



GZUW 10SQ-D2
High-quality SQ subwoofer
450 W RMS / 2x 2 Ω



GZUW 12SQ-D2
High-quality SQ subwoofer
600 W RMS / 2x 2 Ω



Model Specifications

General information

Each high-performance SQ speaker setup requires an equivalent low frequency extension. GZUB BR vented subwoofers of the URANIUM series match perfectly. Elegantly designed, both available enclosures provide the required amount of bass for individual audio setups.

Common features:

- High-quality vented SQ subwoofer
- Solid enclosure made from MDF
- Airflow-optimized ventilation
- URANIUM series SQ-D2 driver
- Resonance-free aluminum cast basket
- 50 mm / 2" copper voice coil
- GZ- design push terminal



GZUB 8BR
High-quality SQ vented subwoofer
300 W RMS / 2x 2 Ω
20.5 L / 0.72 cu.ft.



GZUB 10BR
High-quality SQ vented subwoofer
450 W RMS / 2x 2 Ω
30 L / 1.06 cu.ft.



GZST 4S
4-pin push terminal



HYDROGEN SERIES

High-Grade Technology

Products of the HYDROGEN series match with the demands of highly sophisticated customers. Amazing performance, great sound quality and high SPL whenever required. The subwoofers have been developed to handle a huge amount of input power reaching extremely high bass levels, to be used successfully even under competition conditions. Matching 2- and 3-way component speaker systems and a number of MINI amplifiers with compact dimensions for limited installation space complete this famous GROUND ZERO line-up.

Model Specifications

General information



GZHA MINI ONE
Compact mono subwoofer amplifier
1x 220 / 390 / 630 W @ 4 / 2 / 1 Ω
Link mode 1500 W max @ 2 Ω



GZHA MINI ONE-K
Compact mono subwoofer amplifier
1x 340/600/1000 W RMS @ 4 / 2 / 1 Ω
Link mode 2300 W max @ 2 Ω

Especially for limited installation space, GROUND ZERO offers the compact sized HYDROGEN MINI full-range class D amplifiers. Meeting all requirements, a 2-channel, a 4-channel and a 5-channel model is available in a small-sized black-anodized heatsink. Two mono amplifiers deliver a bunch of power for subwoofers, while another mono amplifier and a 4-channel version are offered for 24 V applications. In addition, a brand new 5-channel DSP amplifier is available now, offering the same compact footprint as GZHA MINI FIVE with the benefit of a built-in 7-channel DSP.

Common features:

- Compact sized amplifiers
- High-efficient class D technology
- SMD components
- Variable active crossover
- Bass boost & phase shift (not GZHA MINI FIVE)
- Stabilized power supply
- Large terminals
- Solid heatsink with engraved GZ lettering
- High-level input with auto-on function
- (suitable for impedance controlling OEM head units, e.g. latest Volkswagen models)
- Link mode for two amplifiers (MINI ONE / ONE-K)
- Bass remote control included (not for GZHA MINI FOUR, GZHA MINI FIVE-DSP)



GZHA MINI TWO*
Compact 2-channel full-range amplifier
2x 130/230 W RMS @ 4 / 2 Ω
Bridged mode 1x 550 W max @ 4 Ω
*Improved SQ version



GZHA MINI FOUR*
Compact 4-channel full-range amplifier
4x 80/130 W RMS @ 4 / 2 Ω
Bridge mode 2x 320 W max @ 4 Ω
*Improved SQ version
Wired remote control available separately

GZHA MINI FOUR-24V
24 V power supply



GZHA MINI FIVE*
Compact 5-channel full-range amplifier
4x 75/125/- & 1x 190/320/500 W RMS @ 4 / 2 / 1 Ω
*Improved SQ version

*Improved SQ version

The SQ upgrade stage contains not only the latest high-level input circuit, but indicates that a number of electronic parts influencing the sound quality have been changed to enhance the overall performance. Each full range amplifier received the SQ upgrade.



GZHA MINI FIVE-DSP
Compact 5-channel full-range DSP amplifier
4x 75/125/- & 1x 190/320/500 W RMS @ 4 / 2 / 1 Ω

Detailed product information on page 53!



GZDSP REM 4-8XII-S
Optional wired remote control



GZDSP BTS 4-8XII
USB interface for wireless music streaming & app control

HYDROGEN Loudspeaker system

General information	Model Specifications
Powerful loudspeaker components and systems matching the HYDROGEN series to be combined with amplifiers and subwoofers. Based on the aluminum cast from the URANIUM series, the engineers have now realized a powerful midwoofer. In combination with the brand-new vented silk dome tweeter and a 2-way passive crossover, the new HYDROGEN series GZHC 165.2 2-way system is born. Features ◦ 2-way speaker system with powerful soundcharacter ◦ Klippel® optimized 165 mm / 6.5" midwoofer ◦ Non-pressed paper cone ◦ GZ-design aluminum cast basket ◦ Powerful ferrite motor ◦ Durable rubber surround ◦ 25 mm / 1" silk dome tweeter ◦ Flush mount housing and coupled chamber ◦ Variable 12/6 dB/oct crossover with level adjustment ◦ GZ- design hexagon style protection grill	GZHC 165.2 2-way component speaker system 130 W RMS / 220 W max Freq. response 40 – 24000 Hz 

HYDROGEN Loudspeaker components


General information	Model Specifications
The HYDROGEN series loudspeakers are now available for 3-way full active applications.	GZHK 165 Powerful midwoofer 120 W RMS / 180 W max Freq. response 40 – 5000 Hz  GZHM 80 SQ midrange 50 W RMS / 80 W max Freq. response 170 – 5000 Hz  GZHT 25S 25 mm / 1" silk dome tweeter 70 WRMS / 110 W max Freq. response 2200 – 24000 Hz 

General information

The HYDROGEN SPL subwoofer line-up contains a great variety of models in many different sizes for various demands. Massive aluminum cast baskets and a lot of further technologies enhance the reachable SPL level. Apart from the smallest member of the family, each model is available in D1 or D2 voice coil version for a more flexible amplifier setup.

Common features:

- High-power SPL subwoofer
- Fiber-reinforced paper cone
- High excursion foam surround
- High-temperature copper voice coils
- Progressive 2-layer spider
- GZ- design aluminum cast basket
- Powerful street bass and SPL performance

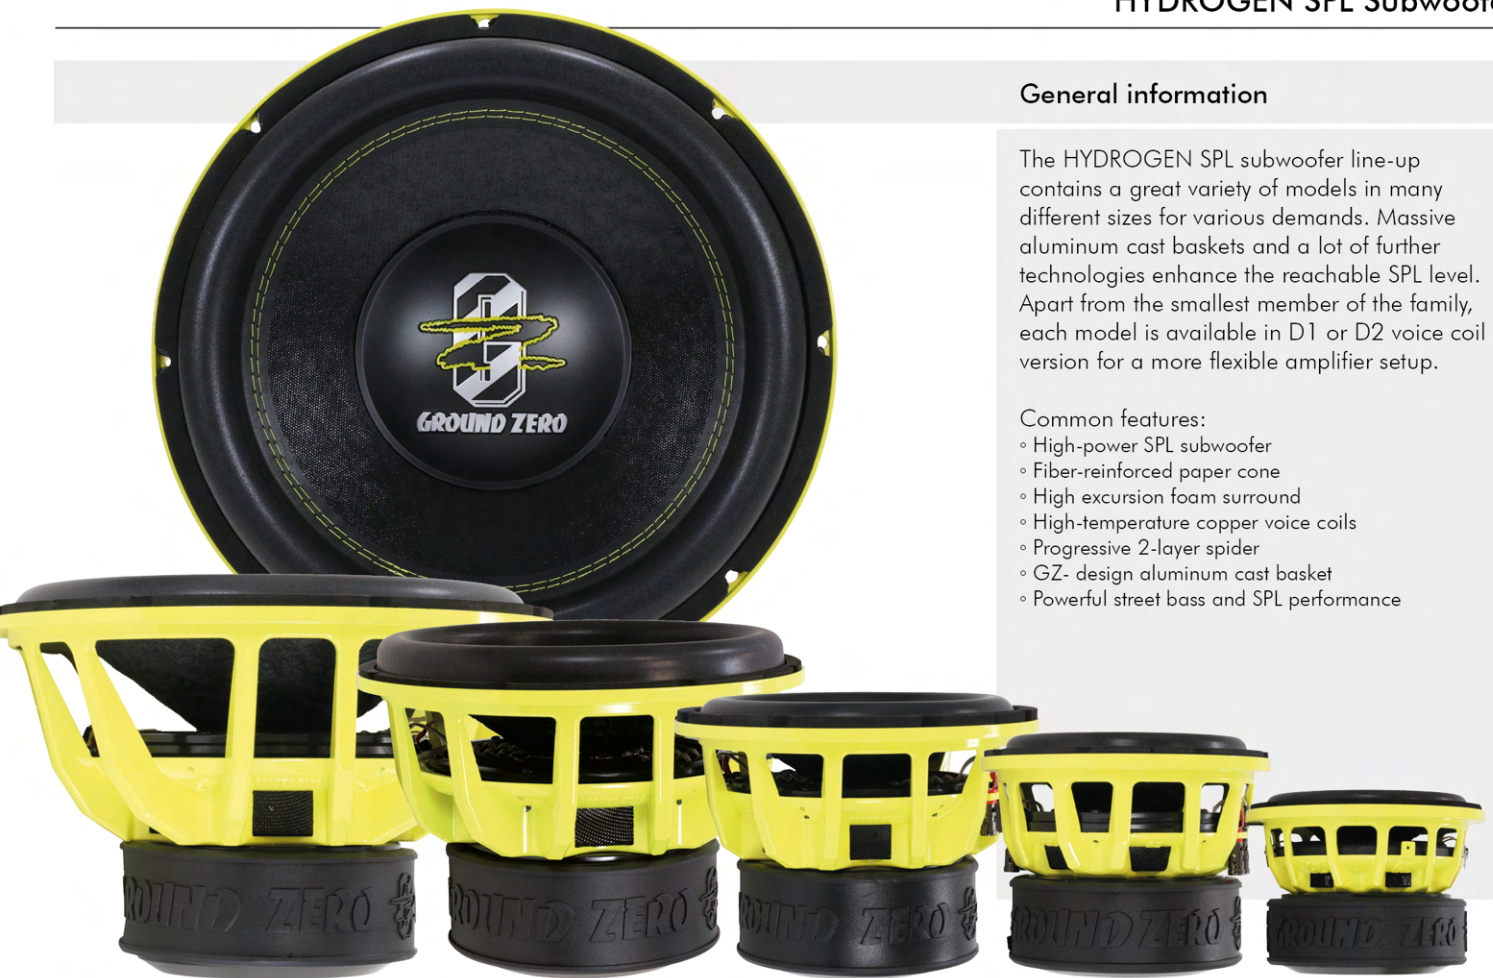

GZHW 38XSPL-D1
High-power SPL subwoofer
3500 W SPL / 2x 1 Ω

GZHW 30XSPL-D1
High-power SPL subwoofer
3000 W SPL / 2x 1 Ω

GZHW 25XSPL-D1
High-power SPL subwoofer
2500 W SPL / 2x 1 Ω

GZHW 20XSPL-D1
High-power SPL subwoofer
1500 W SPL / 2x 1 Ω

GZHW 16SPL
High-power SPL subwoofer
1000 W SPL / 2x 2 Ω
50 mm / 2" voice coil

GZHW 38XSPL-D2
High-power SPL subwoofer
3500 W SPL / 2x 2 Ω

GZHW 30XSPL-D2
High-power SPL subwoofer
3000 W SPL / 2x 2 Ω

GZHW 25XSPL-D2
High-power SPL subwoofer
2500 W SPL / 2x 2 Ω

GZHW 20XSPL-D2
High-power SPL subwoofer
1500 W SPL / 2x 2 Ω

HYDROGEN FLAT Subwoofers

General information

The brand-new GZ HYDROGEN FLAT line solves the problem of cramped installation space requiring a shallow enclosure for the subwoofer.

Equipped with a powerful motor and a huge voice coil known from the existing subwoofers of the HYDRGEN SPL series, these models can handle power up to 1200 Watts SPL.

Common features:

- High-power SPL subwoofer
- Shallow installation depth
- Klippel® optimized
- Efficient ferrite magnet
- Durable U-shape rubber surround
- Massive aluminum cast basket
- Paper sandwich cone
- 4-layer copper voice coil
- Chrome-plated push terminal



GZHW 12SPL-D2 FLAT
High-power flat SPL subwoofer
700 W RMS / 1200 W SPL
2x 2 Ω
63 mm / 2.5" copper voice coil

GZHW 10SPL-D2 FLAT
High-power flat SPL subwoofer
600 W RMS / 1000 W SPL
2x 2 Ω
63 mm / 2.5" copper voice coil

GZHW 8SPL-D2 FLAT
High-power flat SPL subwoofer
500 W RMS / 800 W SPL
2x 2 Ω
50 mm / 2" copper voice coil



RADIOACTIVE SERIES

Advanced Dynamics

The RADIOACTIVE series offers a wide range of exceptional high-efficient loudspeakers and subwoofers for daily use but ready for SQ and SPL competition, as well.

During the development GROUND ZERO focused especially on natural and dynamical audio reproduction of digitally compressed music. Two powerful class D amplifiers are matching power suppliers for each kind of custom application. Recently, the line has been expanded by some compact but though high-power capable ready-to-play vented subwoofer enclosures.

Model specifications

GZRA 2HD

Powerful 2-channel class D amplifier
 2x 285 / 450 W RMS @ 4 / 2 Ω
 Bridge mode 1x 900 W RMS @ 4 Ω
 Wired remote control available separately



GZTA Bassremote
 Optional remote control for GZRA 2HD

GZRA 4HD

Powerful 4-channel class D amplifier
 4x 175 / 275 W RMS @ 4 / 2 Ω
 Bridge mode 2x 550 W RMS @ 4 Ω




General information

The RADIOACTIVE series Class D amplifiers deliver astonishing power at high SQ level and an extraordinary frequency range for high-resolution music reproduction.

Common features:

- High-efficient Class D amplifiers
- High-level input with auto-on function
- Wide-band low pass filter
- Wide-band high pass filter
- Variable bass boost
- Ready for Start/Stop vehicles
- Solid black-anodized aluminum heatsink
- Multiple protection circuit

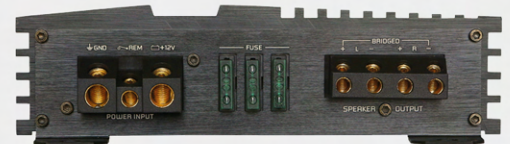

General information

The RADIOACTIVE SQ speaker systems have been developed for highly demanding listeners. Containing coated silk dome tweeters and high-grade passive crossovers with various options, the passive sets are available as a 2- or 3-way package.

Common features:

- High-dynamic SQ loudspeaker
- Black-anodized aluminum cone
- Klippel® optimized ferrite motor
- Coated silk dome tweeter
- 12 dB/oct high-grade crossover
- 6/12 dB/oct crossover (IV version)
- High-efficient 3-ohm impedance
- Linearizing copper cap
- Hexagon style protection grill
- Detailed and natural music reproduction



GZTH 25-28B

Optional tweeter housing for GZRT 25SQ

Model specifications

GZRC 165.2SQ

High-dynamic 2-way component speaker system
120 W RMS / 190 W max



GZRC 165.3SQ

High-dynamic 3-way component speaker system
160 W RMS / 250 W max



GZRC 165.3SQ-ACT

High-dynamic 3-way set for active applications

Components:
GZRK 165SQ
GZRM 80SQ
GZRT 25SQ

GZRC 165.2SQ-IV

High-dynamic 2-way component speaker system
Installer version
120 W RMS / 190 W max
Tweeter housing included



RADIOACTIVE Loudspeaker components



GZRT 25SQ

SQ silk dome tweeter
70 W RMS / 110 W max
Freq. response 3 – 25 kHz



GZRM 80SQ

SQ midrange
50 W RMS / 80 W max
Freq. response 140 – 4000 Hz



GZRK 165SQ

High-dynamic midwoofer
110 W RMS / 160 W max
Freq. response 35 – 4000 Hz

Model specifications

General information



GZRF 4.0SQ
High-dynamic 2-way coaxial loudspeaker
70 W RMS / 110 W max
Freq. response 70 – 24000 Hz



GZRF 5.2SQ
High-dynamic 2-way coaxial loudspeaker
80 W RMS / 120 W max
Freq. response 60 – 24000 Hz



GZRF 6.5Q
High-dynamic 2-way coaxial loudspeaker
100 W RMS / 140 W max
Freq. response 50 – 24000 Hz



GZRF 69SQ
High-dynamic 3-way coaxial loudspeaker
130 W RMS / 200 W max
Freq. response 40 – 24000 Hz

The new RADIOACTIVE SQ coaxial speakers satisfy the request for dynamical and high-efficient audio reproduction. Black anodized aluminum cones used for the midwoofers in combination with a new coated silk dome tweeter deliver an amazing sound performance.

Common features:

- High-dynamic coaxial loudspeakers
- Black-anodized aluminum cone
- Rubber surround
- Resonance-free steel basket
- High-efficient 3-ohm impedance
- 25 mm / 1" silk dome tweeter (not GZRF 69SQ)
- Mylar midrange and tweeter (GZRF 69SQ)
- Tweeter and overload protection
- Hexagon style protection grill
- Detailed and natural music reproduction



RADIOACTIVE Subwoofers

General information

Using most of the particular features previously developed for the SPL subwoofers, the street versions have been equipped with a large, long-stroke surround and a particular spider to reduce the resonance frequency for daily music listening.

Common features:

- Powerful low bass subwoofer
- Fiber-reinforced paper cone
- Multilayer foam U-Shape surround
- High-temperature copper voice coil
- High-excursion single layer spider
- Optimal for daily use



Model specifications

GZRW 25-D2
High-quality subwoofer
600 W RMS
2x 2 Ω



GZRW 30-D2
High-quality subwoofer
800 W RMS
2x 2 Ω



GZRW 38-D2
High-quality subwoofer
1000 W RMS
2x 2 Ω




RADIOACTIVE FLAT Subwoofers

General information

New RADIOACTIVE FLAT subwoofers are optimized for shallow installations like small enclosures or motor bikes. Available in two different sizes.

Common features:

- Powerful low-profile subwoofer
- Paper sandwich cone
- Efficient ferrite motor
- Durable rubber surround
- Optimal for daily use

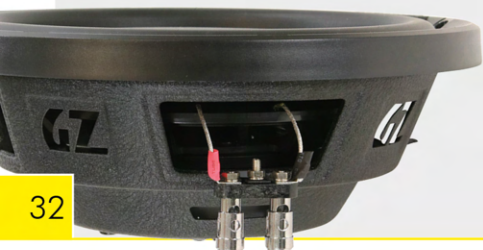

Model specifications



GZRW 250-D2 FLAT
High-quality subwoofer
400 W RMS
2x 2 Ω



GZRW 300-D2 FLAT
High-quality subwoofer
450 W RMS
2x 2 Ω

General information

RADIOACTIVE SPL subwoofers include some particular technologies for SPL use at a very reasonable price. The right choice for dedicated SPL competition rookies.

Common features:

- High-power SPL subwoofer
- Fiber-reinforced paper cone
- Multilayer foam U-Shape SPL surround
- High-temperature voice coils
- Progressive double layer spider
- Ultimate choice for SPL-Rookies



GZRW 15XSPL
High-quality SPL subwoofer
1200 W RMS / 1800 W SPL
2x 2 Ω

GZRW 12XSPL
High-quality SPL subwoofer
1000 W RMS / 1500 W SPL
2x 2 Ω

GZRW 10XSPL
High-quality SPL subwoofer
800 W RMS / 1200 W SPL
2x 2 Ω

GZRW 8XSPL
High-quality SPL subwoofer
500 W RMS / 1000 W SPL
2x 2 Ω

GZRW 6XSPL
High-quality SPL subwoofer
350 W RMS / 700 W SPL
2x 2 Ω

RADIOACTIVE SPL Enclosures

General information

RADIOACTIVE SPL subwoofers include some particular technologies for SPL use delivering a lot of low frequency output from rather compact boxes. The right choice for everyday listening and dedicated SPL competition rookies. The line contains four ready-to-play vented enclosure subwoofers.



GZRB 16SPL
Space-saving vented SPL subwoofer
350 W RMS / 700 W SPL
2x 2 Ω



GZRB 20SPL
Space-saving vented SPL subwoofer
500 W RMS / 1000 W SPL
2x 2 Ω



GZRB 25SPL
Space-saving vented SPL subwoofer
500 W RMS / 1000 W SPL
2x 2 Ω



GZRB 30SPL
High-quality vented SPL subwoofer
700 W RMS / 1350 W SPL
2x 2 Ω



TITANIUM SERIES

Premium Quality

The products of the GROUND ZERO TITANIUM series combine premium quality and high- efficiency. A wide range of dedicated loudspeakers, coaxials and component systems meet most of individual needs. TITANIUM series amplifiers are equipped with sophisticated technology and encased by a posh heatsink with brushed black aluminum color surface.

Flat subwoofers complete the current line-up.

Model specifications

General information

GZTA 2255X-B

Powerful 2-channel class AB amplifier
2x 150/250 W RMS @ 4 / 2 Ω
Bridge mode 1x 600 W max @ 4 Ω




The products of the TITANIUM line combine premium quality and high efficiency. A wide range of dedicated speakers meet most of the customer's need. The amplifiers are equipped with sophisticated technology and encased by a posh heatsink with brushed black aluminum surface. For an individual design, both black and yellow color side panels are included for each model.

Common features:

- High-power amplifier
- Stabilized power supply
- Variable active crossover
- Subsonic filter
- Bass Boost
- Black-anodized aluminum heatsink
- High-gloss acrylic inlay
- 2 pairs of side panels included (yellow and black color)

GZTA 4125X-B

Powerful 4-channel class AB amplifier
4x 90/130 W RMS @ 4 / 2 Ω
Bridge mode 2x 320 W max @ 4 Ω

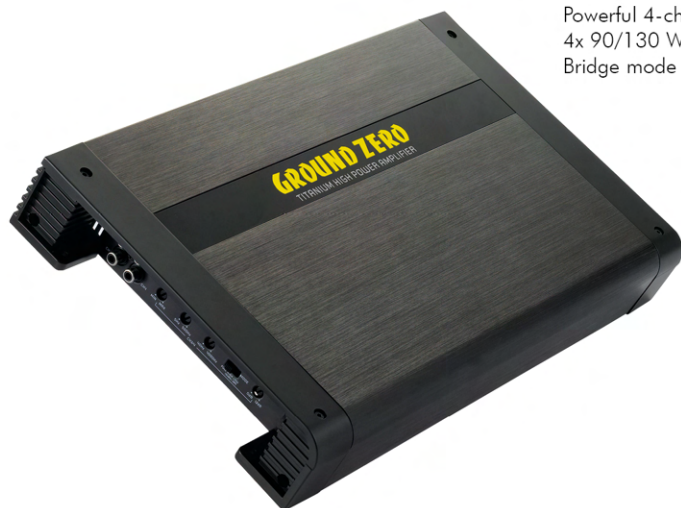

GZTA 4230X-B

Powerful 4-channel class AB amplifier
4x 140/230 W RMS @ 4 / 2 Ω
Bridge mode 2x 550 W max @ 4 Ω



GZTA Bassremote
Optional remote control



General information

The TITANIUM series contains a wide range of component loudspeaker systems with yellow color 3D-HQPP cone. Each component system includes the 20 mm / 0.79" soft dome tweeter and installer-friendly crossovers.

Common features:

- High-efficient component loudspeaker system
- 3D-HQPP cone
- Rubber surround
- Resonance-free steel basket
- High-efficient 3-ohm impedance
- Soft dome tweeter
- Hexagon style protection grill

Model specifications

GZTC 130.2X

High-quality 2-way component system
80 W RMS / 130 W max
Freq. response 60 – 22000 Hz
Compact 12 dB/oct high pass filter
In-line low pass filter



GZTC 165.2X

High-quality 2-way component system
100 W RMS / 150 W max
Freq. response 50 – 22000 Hz
Compact 12 dB/oct high pass filter
In-line low pass filter



GZTC 165.3X-II

High-quality 3-way component system
120 W RMS / 180 W max
Freq. response 50 – 22000 Hz
12 dB/oct crossover



GZTC 165.3X-ACT

High-quality 3-way set for active applications
Components:
19 mm / 0.75" soft dome tweeter
GZTM 100NEO
GZTK 165



TITANIUM Loudspeaker components



GZTT 20S

High-quality 20 mm / 0.79" soft dome tweeter
40 W RMS / 70 W max
Freq. response 3 - 22 kHz



GZTM 100NEO

High-quality neodymium midrange
40 W RMS / 60 W max
Freq. response 250 - 7000 Hz



GZTK 165

High-quality neodymium midrange
80 W RMS / 100 W max
Freq. response 50 - 4000 Hz

Model specifications

GZTF 4.0X
High-quality 2-way coaxial speaker
70 W RMS / 100 W max
Freq. response 70 - 22000 Hz

GZTF 5.2X
High-quality 2-way coaxial speaker
80 W RMS / 110 W max
Freq. response 60 - 22000 Hz

GZTF 6.5X
High-quality 2-way coaxial speaker
90 W RMS / 130 W max
Freq. response 50 - 22000 Hz

GZTF 69X
High-quality 3-way coaxial speaker
130 W RMS / 190 W max
Freq. response 40 - 22000 Hz

General information

High-efficiency coaxial loudspeakers of the TITANIUM series offer a great value sound upgrade for OEM or aftermarket head units with the significant yellow 3D-HQPP cone.

Common features:

- High-efficient coaxial loudspeaker
- 3D-HQPP cone
- Rubber surround
- Resonance-free steel basket
- High-efficient 3-ohm impedance
- 13 mm / 0.51" Mylar tweeter
- 55 mm / 2.2" Mylar midrange (GZTF 69X)
- Hexagon style protection grill



TITANIUM Flat subwoofers

Model specifications

GZTW 10F*
High-quality flat subwoofer
300 W RMS / 2x 2 Ω
***Improved Q Version**
Developed for high SQ in small, sealed enclosures

GZTW 12F
High-quality flat subwoofer
350 W RMS / 2x 2 Ω

General information

When space is limited, special solutions are required. That's why GROUND ZERO offers two particularly flat subwoofers in the TITANIUM series.

Common features:

- Extremely flat IMPP cone
- Resonance-free steel basket
- Aluminum dustcap
- Push terminal





IRIDIUM SERIES

Top Performance @ Entry Level

Representing the entry line of GROUND ZERO the IRIDIUM series offers a lot of useful features and good performance for most applications. The range contains a variety of affordable amplifiers, loudspeakers and subwoofers for daily use as well as for SPL purpose.

The Subwoofers are available for individually designed enclosures or as ready-to-play vented boxes.

Model specifications

General information



GZIA 2.85
High-quality class A/B amplifier
2x 60 / 85 W RMS @ 4 / 2 Ω
Bridged mode 1x 200 W max @ 4 Ω



GZIA 2.135
High-quality class A/B amplifier
2x 85 / 135 W RMS @ 4 / 2 Ω
Bridged mode 1x 300 W max @ 4 Ω
Wired remote control available separately



GZIA 2.240
High-quality class A/B amplifier
2x 150 / 240 W RMS @ 4 / 2 Ω
Bridged mode 1x 550 W max @ 4 Ω
Wired remote control available separately



GZIA 4.120
High-quality class A/B amplifier
4x 70 / 120 W RMS @ 4 / 2 Ω
Bridged mode 2x 275 W max @ 4 Ω



GZIA 1.700
High-quality mono full range class A/B amplifier
1x 230 / 400 / 630 W RMS @ 4 / 2 / 1 Ω
1x 700 W max @ 1 Ω
Incl. wired bass remote control



GZIA 1.1150D
High-quality mono class D amplifier
1x 370 / 665 / 1050 W RMS @ 4 / 2 / 1 Ω
1x 1150 W max @ 1 Ω
Incl. wired bass remote control



GZIA 1.1500D
High-quality mono class D amplifier
1x 425 / 775 / 1300 W RMS @ 4 / 2 / 1 Ω
1x 1500 W max @ 1 Ω
Incl. wired bass remote control



GZIA 1.2000D
High-quality mono class D amplifier
1x 750 / 1300 / 1800 W RMS @ 4 / 2 / 1 Ω
1x 2000 W max @ 1 Ω
Incl. wired bass remote control

The range of amplifiers contains a variety of affordable models for the daily use and for SPL purpose. The feature list includes the most important functions like high-level input with auto turn-on or a remote control for the low-impedance stable mono amplifiers.

Common features:

- 4 Ω / 2 Ω stable in stereo mode
- 1 Ω stable (mono amplifiers)
- Status indicator
- Bass Boost (mono amplifiers)
- Variable active crossover
- High-level input with auto-on function
- Adjustable input sensitivity
- Soft-delayed remote turn-on
- Thermal / Short / Overload protection



GZIA Bassremote
Optional remote control

IRIDIUM Loudspeaker systems

The latest IRIDIUM series component loudspeakers feature a GZ-design basket with improved ventilation and higher stability, increased spider diameter and a particularly shaped HQPP cone with 3-D honeycomb structure. With the revised 19 mm / 0.75" tweeter and a 12 dB/oct high pass filter these new generation component systems are the best sounding IRIDIUM series loudspeakers, ever!

Common features:

- High-quality 2-way component loudspeaker system
- Klippel® optimized
- HQPP cone with 3D structure
- Durable rubber surround
- Resonance free steel basket
- 19 mm / 0.75" Mylar dome tweeter
- 12 dB/oct high-pass filter with level adjustment
- Hexagon style protection grill



GZIC 130.2
90 W RMS / 140 W max
Freq. response 60-20000 Hz



GZIC 165.2
100 W RMS / 150 W max
Freq. response 50-20000 Hz

IRIDIUM SPL System and loudspeaker

Expanding the line-up for the fans of SPL levels, GZ engineers created a high-power capable component speaker system including a high-roll midwoofer and combined it with the GZCT 25M-SPL tweeter. The SPL midwoofer is available separately, as well.

Features:

- High-power 2-way SPL component loudspeaker system
- Klippel® optimized
- HQPP cone with 3D-structure
- Durable rubber surround
- Resonance free steel basket
- 25 mm / 1" Mylar SPL tweeter w. flush mount housing
- 12 dB/oct high-pass filter with level adjustment
- Hexagon style protection grill



GZIC 165.2SPL
120 W RMS / 200 W SPL
Freq. response 45-20000 Hz



GZIC 165SPL
High-power SPL midwoofer
80 W RMS / 120 W SPL / 3 Ω

IRIDIUM Coaxial loudspeakers

Common features:

- High-quality coaxial loudspeakers
- HQPP cone with 3D-honeycomb structure
- Wide frequency response
- 13 mm / 0.51" Mylar tweeter
- 50 mm / 2" Mylar midrange (GZIF 69)



GZIF 4.0
2-way coaxial loudspeaker
60 W RMS / 100 W max



GZIF 5.2
2-way coaxial loudspeaker
70 W RMS / 110 W max



GZIF 6.5
2-way coaxial loudspeaker
80 W RMS / 120 W max



GZIF 69
3-way coaxial loudspeaker
120 W RMS / 180 W max

IRIDIUM Flat loudspeakers and systems

Common features:

- High-quality flat loudspeakers
- Coated paper cone
- Wide frequency response
- 13 mm / 0.51" Mylar tweeter (coax)
- 19 mm / 0.75" Soft dome tweeter (compo)



GZIF 4001FX
2-way flat coaxial
50 / 90 W RMS / max



GZIF 5201FX
2-way flat coaxial
60 / 100 W RMS / max



GZIF 6501FX
2-way flat coaxial
70 / 110 W RMS / max



GZIC 400FX
2-way flat compo
60 / 100 W RMS / max



GZIC 650FX
2-way flat compo
100 / 140 W RMS / max

Model specifications

General information



GZIW 10XSPL-D2
High-power SPL subwoofer
700 W SPL / 2x 2 Ω



GZIW 12XSPL-D2
High-power SPL subwoofer
1000 W SPL / 2x 2 Ω



Available in
yellow or pink color

The IRIDIUM series contains a new 25 cm / 10" and a 30 cm / 12" SPL model with 3D-structured pressed paper cone and stitched surround. The larger version is available as pink color edition, as well to fit individual applications.



IRIDIUM Street Subwoofers

Model specifications

General information



GZIW 165
High-quality subwoofer
100 W RMS / 4 Ω



GZIW 200
High-quality subwoofer
150 W RMS / 4 Ω



GZIW 250
High-quality subwoofer
250 W RMS / 4 Ω



GZIW 300
High-quality subwoofer
350 W RMS / 4 Ω

The IRIDIUM street subwoofers with single 4 Ω voice coil, long stroke rubber surround and a new HQPP cone with 3D-honeycomb structure are perfect for daily use.

Common features:

- HQPP cone with 3D-honeycomb structure
- U-shape rubber surround
- High-power copper voice coil
- Audiophile PC spider
- Push terminal
- Woven-in lead wires
- Resonance-free steel basket
- 3D dust cap logo
- Rubber gasket

General information

A subwoofer can cover all demands on low frequency reproduction in a suitable housing. The IRIDIUM series offers a wide selection of passive models as well as some active versions.

Common features:

- Solid enclosure from MDF wood
- Logo embroidery
- Flow-optimized bass tunnel (ventilation)
- GZ-design push terminal
- Stable HQPP cone with 3D-honeycomb structure
- Rubber surround
- High-power copper voice coil
- Audiophile PC spider
- Woven-in lead wires
- Resonance-free steel basket
- 3D dustcap logo
- Plastic injection gasket with logo

ACT Version
with integrated amplifier



Quick-release power connector

Common features ACT models:

- Powerful active subwoofer
- Class A/B MOSFET amplifier
- Adjustable bass boost
- Phase shift (phase switch)
- Low pass filter (30 - 120 Hz)
- High-level input with auto-on function
- Quick-release power connector
- Remote control connector*

*Wired remote control available separately



GZTA Bassremote
Optional remote control for ACT models

Model specifications

GZIB 20BR
High-quality vented
subwoofer enclosure
150 W RMS / 4 Ω



GZIB 20BR-ACT
High-quality vented active
subwoofer enclosure
120 W RMS / 220 W max



GZIB 25BR
High-quality vented
subwoofer enclosure
250 W RMS / 4 Ω

GZIB 25BR-ACT
High-quality vented active
subwoofer enclosure
150 W RMS / 270 W max



GZIB 30BR
High-quality vented
subwoofer enclosure
350 W RMS / 4 Ω

GZIB 30BR-ACT
High-quality vented active
subwoofer enclosure
180 W RMS / 300 W max



GZIB 2.30BR
High-quality vented subwoofer enclosure
700 W RMS / 2x 2 Ω

Model specifications

GZIB 12SPL
High-quality vented SPL subwoofer enclosure
500 W RMS / 1000 W SPL
2x 2 Ω



GZIB 2.12SPL
High-quality vented SPL subwoofer enclosure
1000 W RMS / 2000 W SPL
4x 2 Ω



General information

Satisfying the demand for high-level sound pressure, GROUND ZERO offers a single and a double 30 cm / 12" SPL subwoofer enclosure.

Common features:

- Solid enclosure from MDF wood
- Logo embroidery
- Flow-optimized bass tunnel (ventilation)
- GZ-design push terminal
- High-power SPL subwoofer
- Klippel® optimized
- 3D-structured pressed paper cone
- 63 mm / 2.5" copper round wire voice coil
- High-roll sandwich surround
- Progressive 2-layer spider
- Speaker protection bars



GZST 4S
4-pin push terminal

IRIDIUM Bass Kit

Model Specifications

GZ BASS KIT 12.300X-II
Powerful 30 cm / 12" bass kit
Mono class A/B amplifier



Also available including wiring kit
(GZ BASS KIT 12.300X-II incl. Cable)



Features

- Powerful 30 cm / 12" bass kit
- Loaded subwoofer enclosure
- 40 Liter / 1.41 ft³
- GZ-design push terminal
- Airflow-optimized ventilation port
- Mono class A/B amplifier
- Output power 300 Watts max
- Bass boost control
- Variable low pass filter
- High-level input with auto-on function

Optional wiring kit GZPK 10XLC-II

- 10 mm² / 7 AWG power kit
- Twisted RCA cable
- 1.5 m / 4.92 ft 2.5 mm² / 13 AWG speaker cable
- Mini ANL fuseholder incl. 60 A fuse
- Remote cable



GZST 2S
2-pin push terminal



COMPETITION SERIES

Realistic Stage Atmosphere

Experiencing real concert atmosphere or club feeling requires professional high SPL levels to be achieved. In consequence, particular and powerful loudspeakers and power amplifiers need to be used. GROUND ZERO's development department doesn't make any compromise whenever the purpose of a product is defined that clear. As a result, each COMPETITION series member will be the right choice for demanding applications expecting very high SPL level audio reproduction with high sound quality.



COMPETITION PRO SERIES

The benchmark for high-SPL audio

The COMPETITION PRO line marks the very top level of electrically and mechanically possible power handling within the GROUND ZERO line-up. Meanwhile, the red basket drivers have become well-known and famous for their performance at open show and motorbike applications at very high SPL and SQ level.

Model specifications

General information



GZCA 500.Q1
4 – Channel competition SPL amplifier
4x 450 W RMS / 575 W max @ 1 Ω

GROUND ZERO's class D high-power amplifiers have become a benchmark delivering a huge amount of output power for any kind of open show or SPL application. The latest generation starts with the launch of some models covering the essential demand of subwoofers at rated 1500 up to 8500 Watts.

◦ Bass remote control included (not for GZCA 500.Q1)



GZCA 1500.M1
Mono competition SPL amplifier
1x 1350 W RMS / 1900 W max @ 1 Ω

GZCA 1500.M2
Mono competition SPL amplifier
1x 1350 W RMS / 1900 W max @ 2 Ω



GZCA 3000.M1
Mono competition SPL amplifier
1x 2900 W RMS / 4000 W max @ 1 Ω

GZCA 3000.M2
1x 2900 W RMS / 4000 W max @ 2 Ω



GZCA 6000.M1
Mono competition SPL amplifier
1x 5000 W RMS / 6200 W max @ 1 Ω

GZCA 8500.M1 (w/o picture)
Mono competition SPL amplifier
1x 8100 W RMS / 8500 W max @ 1 Ω



COMPETITION PRO Full range coaxial loudspeakers

General information	Model specifications
Combining a high-power capable compression tweeter with an amazing midrange results in these new red basket coaxial loudspeakers. Both models are designed for full-active setups by using a DSP or an active crossover delivering huge SPL levels.	GZCF 165NEO-PRO High-power 2-way SPL coaxial speaker for active applications with 25 mm / 1" compression tweeter 150 + 50 W RMS / 300 + 100 W max Freq. response 150 – 20 kHz Neodymium magnet GZCF 200NEO-PRO (w/o picture) High-power 2-way SPL coaxial speaker for active applications with 25 mm / 1" compression tweeter 250 + 50 W RMS / 400 + 100 W max Freq. response 130 Hz – 20 kHz Neodymium magnet



COMPETITION PRO Midrange loudspeakers

General information	Model specifications
These red basket drivers have set benchmarks for SPL performance. A high-efficient neodymium motor and the extraordinary power handling leads to perfectly kicking midrange performance in every kind of open show or motorbike setup. Pure Rock’n’Roll for your ears!	GZCM 6.5N-PROX High end 165 mm / 6.5" midrange 200 W RMS / 400 W max 180 – 12000 Hz / SPL 96 dB Neodymium magnet GZCM 8.0N-PROX High end 200 mm / 8" midrange 300 W RMS / 500 W max 120 – 7000 Hz / SPL 98 dB Neodymium magnet



COMPETITION PRO Tweeters

General information	Model specifications
The COMPETITION PRO series marks the very top level of electrically and mechanically possible power handling, nowadays. This tweeter is designed especially for long distance open show and demonstration performances at very high SPL levels, if required.	GZCT 19N-PROX B High-end compression tweeter 30 W RMS / 100 W max 3 – 22 kHz / SPL 109 dB



COMPETITION SQL Tweeter

General information	Model specifications
While the main the purpose of a compression tweeter is delivering a lot of SPL at high frequencies, this particular tweeter handles a huge amount of input power and thus, combines SQ music reproduction with high SPL level. That´s called SQL.	GZCT 25SQL 25 mm / 1" horn SQ tweeter 100 W RMS / 150 W max 3 – 22 kHz / SPL 93 dB



Model specifications

General information



GZCC 165.2SQL
High-power 2-way SQL speaker system
160 W RMS / 300 W max
Freq. response 50 – 22000 Hz


For high-power and high-output applications, GROUND ZERO offers a 165 mm / 6.5" and a 200 mm / 8" 2-way component loudspeaker system. Including variable crossovers these systems offer an option to expand the set by another pair of midwoofers for even more fun (SPL).

Common features:

- High-power component loudspeaker system
- High-power variable crossover
- Double-woofer expanding option
- Hexagon style protection grill
- 25 mm / 1" SQL silk dome tweeter (GZCT 25SQL)



GZCC 200.2SQL
High-power 2-way SQL speaker system
200 W RMS / 380 W max
Freq. response 50 – 22000 Hz

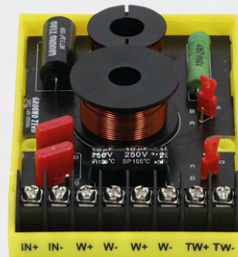

GZCX 165-200.2SQL
2-way high-power competition crossover
also available separately

COMPETITION Mid- / Subwoofer

Model specifications

General information

GZCK 165XSPL
High-power SPL
midwoofer
100 W RMS / 250 W max
50 – 10000 Hz / SPL 93 dB

GZCK 200XSPL
High-power SPL
midwoofer
150 W RMS / 300 W max
50 – 6000 Hz / SPL 93 dB

GZCK 250XSPL
High-power SPL
mid- / subwoofer
200 W RMS / 400 W max
40 – 6000 Hz / SPL 94 dB

While pure midrange drivers of the COMPETITION series require adequate low frequency support, the midwoofers offer a wider low frequency response.



GZCK 250XSPL-GRILL
Hexagon style protection grill available separately

COMPETITION NEO Coaxial loudspeaker

General information	Model specifications
Apart from loudspeaker components, the COMETITION series includes some fullrange loudspeakers and unique models for SPL applications with very good performance. The latest member of this family has been equipped with a high-efficient and installation-friendly neodymium motor and a 28 mm / 1.1" high-power tweeter.	GZCF 6.5SPL-NEO High-power 2-way SPL coaxial speaker with flat neodymium motor and 28 mm / 1.1" tweeter 100 W RMS / 250 W max Freq. response 50 Hz – 20 kHz Reduced installation depth



COMPETITION Full range coaxial loudspeakers

General information	Model specifications
Coaxial loudspeakers have a major acoustical advantage compared to multi-way component speaker systems. There is hardly any phase deviation of the reproduced music signal between the midrange driver and the tweeter. The speakers can be used in active or passive setups.	GZCF 6.5SPL High-power 2-way SPL coaxial speaker 100 W RMS / 250 W max Freq. response 50 – 20000 Hz
	GZCF 8.0SPL High-power 2-way SPL coaxial speaker 150 W RMS / 300 W max Freq. response 40 – 20000 Hz
	GZCF 69SPL High-power 2-way SPL coaxial speaker 150 W RMS / 300 W max Freq. response 50 – 20000 Hz
	GZCF 7104XSPL High-power 4-way SPL coaxial speaker 200 W RMS / 300 W max Freq. response 35 – 25000 Hz Hexagon style protection grill included



Model specifications		General information
GZCM 6.5NEO-DC High-efficient SPL midrange 120 W RMS / 320 W max 240 – 12000 Hz / SPL 98 dB	GZCM 8.0NEO-DC High-efficient SPL midrange 180 W RMS / 420 W max 160 – 7000 Hz / SPL 100 dB	Using neodymium for the motor of a loudspeaker increases the efficiency drastically. As a result, the COMPETITION series mid-range drivers offer amazing high SPL levels at still reasonable power input. The black steel baskets used for these models combined with the flat neodymium motor reduce the required installation space and thus, fit most OEM-designed mounting positions.
		

COMPETITION SPL Midrange loudspeakers

Model specifications			General information
GZCM 6.5SPL High-power SPL midrange 100 W RMS / 300 W max 220 – 10000 Hz / SPL 94 dB	GZCM 8.0SPL High-power SPL midrange 150 W RMS / 400 W max 170 – 10000 Hz / SPL 95 dB	GZCM 10.0SPL High-power SPL midrange 200 W RMS / 500 W max 100 – 10000 Hz / SPL 96 dB	A particular customer high-power setup requires midrange speakers capable of handling a huge amount of input power. The line of COMPETITION midrange drivers contains one matching model for each demand.
			

COMPETITION SPL Woofer

Model specifications		General information
	GZCW 12-75SPL High-power SPL woofer 400 W RMS / 800 W max 40 – 3000 Hz / SPL 96 dB 75 mm / 3" voice coil	GROUND ZERO offers a unique COMPETITION series 30 cm / 12" woofer. This model completes an individual custom setup with high SPL drivers.

General information

The line-up of COMPETITION series tweeters includes various models for any kind of custom application. Some models are specially designed for motorbike use while others will cover the needs of open-show installations.

Model specifications

GZCT 25M-SPL

High-quality dome tweeter
Installation-friendly dimensions
70 W RMS / 100 W max
Incl. 12 dB/oct. in-line high pass filter



GZCT 28M-SPL

High-quality dome tweeter
Installation-friendly dimensions
80 W RMS / 110 W max
Incl. 12 dB/oct. in-line high pass filter



GZCT 0500X

High power compression tweeter
30 W RMS / 100 W max
4 – 25 kHz / SPL 102 dB



GZCT 500IV-B

High-power compression tweeter
30 W RMS / 100 W max
4 – 25 kHz / SPL 102 dB



GZCT 3500X-B / S

High power compression tweeter
30 W RMS / 100 W max
3 – 25 kHz / SPL 99 dB
Available in black or silver finish



GZCT 3000X

High-power compression tweeter
40 W RMS / 120 W max
4 – 25 kHz / SPL 105 dB



GZCT 4000X

High power compression tweeter
50 W RMS / 140 W max
2.5 – 20 kHz / SPL 103 dB



GZCT 5000SPL / -B

High power compression tweeter
70 W RMS / 180 W max
2.5 – 20 kHz / SPL 108 dB
Available in yellow or black finish



Model specifications

GZRM 165X
 Water-resistant 2-way coaxial speaker
 70 W RMS / 120 W max
 Freq. response 60 – 25000 Hz



General information

Since listening to favorite music isn't limited to cars, GROUND ZERO offers a particular speaker for environments with special requirements to the construction and water resistance.

The MARINE series coaxial speaker is available in white finish, suitable for places with high humidity such as bathrooms and pool areas or even for off-shore applications with occasionally appearing direct splashing water such as on outer decks or on leisure boats.

Features:

- 2-way marine coaxial loudspeaker
- IMPP cone
- Rubber surround
- Rainwater and splash protected
- Salt water resistant
- 13 mm / 0.51" PEI tweeter
- White frame and protection grill



Speaker Protection

Model specifications

GZ PROTECT
 High quality speaker protection
 Powerhandling 150 W
 min. impedance load 2 Ω



General information

This speaker protection activates as soon as your speakers get overloaded. The overload energy will be transformed into a heat dissipation of the built in resistor and soffit to protect the speaker voice coils and to prevent mechanical clipping.

Features:

- Protects speakers against clipping & electrical overload
- Screw terminal
- Contains 3 different protection-soffits (5, 10, 20 W)
- No change of the signal phase



DSP SERIES

Digital Sound Processing

In general, the in-car environment offers adverse conditions and installation positions for speakers.

However, inaccurate audio reproduction can be corrected by using digital technologies.

For this purpose, the DSP series contains some multi-channel units with a variety of connection options for upgrading OEM or aftermarket systems. The adjustment of the DSP can be done in real time using the included PC software or an APP.

Model specifications

GZHA MINI FIVE-DSP
 High-efficient 5-channel class D amplifier
 with built-in 7-channel DSP
 2x stereo RCA input /
 1x stereo RCA output /
 4-channel high-level input



General information

This 5-channel DSP offers an impressive amount of power in a compact form factor.

Features:

- 2 ohms stable (channels 1-4)
- 1 ohm stable (subwoofer channel)
- 2x stereo RCA input /
1x stereo RCA output /
4-channel high-level input
- Auto-on function (available for high-level input)
- Ready for start-stop vehicles
- Thermal / short circuit / overload protection
- Digital signal processor (DSP)
- Realtime setup of all functions (via PC or app*)
- Simple handling, one-page graphical user interface (Windows® compatible)
- Parametric 10 band equalizer for each channel
- Time alignment (0-8 ms / 0-272 cm / 0-107") for each channel
- Adjustable crossover (HPF / LPF / BPF from 20 Hz to 20 kHz)
- Selectable crossover slope (6 to 24 dB/oct)
- 3 filter characteristics (Butterworth/Bessel/Linkwitz-Riley)
- Selectable phase shift for each channel (0° or 180°)
- Memory for 6 user presets (selectable via remote control, PC or app*)
- Wired multifunction remote control GZDSP REM 4-8XII-S (available separately)
- Wireless music streaming via GZDSP BTS 4-8XII (available separately)

*(requires optional GZDSP BTS 4-8XII)



Accessories



GZDSP REM 4-8XII-S
 Optional wired remote control



Available on the
App Store

GET IT ON
Google Play



GZDSP BTS 4-8XII
 USB interface for wireless music streaming & app control
 Compatible with GZDSP 4-8X / GZDSP 4-8XII / GZHA MINI FIVE-DSP
 Control app available for iOS and Android

Features:

- USB Stick (BT class II)
- BT V4.2 standard
- Transmission frequency 2.4GHz
- Max. range 10 m

DSP PRO Amplifier

General information	Model specifications
The GZDSP 4.80A-PRO is a powerful and high efficient 4-channel amplifier offering the features of an 8-channel DSP. Features: ◦ 8-channel digital signal processor ◦ 6-channel high-level input ◦ 6-channel RCA input ◦ Realtime setting via PC software ◦ 32-bit Cirrus Logic processor ◦ Simple handling, one-page graphical user interface (Windows® compatible) ◦ 31-band equalizer for each channel ◦ Time delay correction ◦ Variable crossover ◦ Phase correction ◦ Auto-on function available for high-level input ◦ Optical and coaxial digital input ◦ 4x RCA output	GZDSP 4.80A-PRO 4-channel DSP amplifier Integrated 8-channel DSP 4x 80 / 130 W RMS @ 4 / 2 Ω GZDSP REMOTE PRO-X included! 

CAR SPECIFIC DSP Amplifier

General information	Model specifications
The plug 'n' play DSP amplifier GZCS DSPA-4.60ISO combines the advantage of a small footprint with a powerful 4-channel amplifier and 8-channel DSP. With the use of optional available GROUND ZERO car specific connection cables, this DSP amplifier can easily be connected to a variety of cars. Features: ◦ 4-channel amplifier with built-in DSP ◦ 4-channel ISO-harness ◦ 8-channel DSP with 4-channel line output ◦ 2x Analog Devices SigmaDSP® ◦ Auto-on function available for high-level input ◦ Ready for start-stop vehicles ◦ Realtime setup of all functions (via PC or app*) ◦ Simple handling, one-page graphical user interface (Windows® compatible) *(requires optional GZDSP BTS 4-8XII)	GZCS DSPA-4.60ISO Compact 4-channel amplifier with built-in DSP 8-channel digital signal processor 4x 45/60 W RMS @ 4 / 2 Ω ISO-harness for plug 'n' play installation  Wired multifunction remote control GZDSP REM 4-8XII-S (available optionally)  Wireless music streaming with interface GZDSP BTS 4-8XII (available optionally) 

DSP PRO Accessories

 GZDSP REMOTE PRO-X This remote control enables the user to adjust GZDSP PRO units easily from the drivers or passengers seat. Features: ◦ Source selection (with coaxial input) ◦ Main level ◦ Subwoofer level ◦ Preset selection ◦ Mute function ◦ Including connection wire	 GZDSP BT-BOX* Interface for wireless music streaming Compatible with: GZDSP 6-8X and 6-8X PRO, GZDSP 4.60ISO, GZDSP 4.80A-PRO Features: ◦ Interface for wireless music streaming ◦ SBC coded transmission ◦ Max. transmission 44.1kHz/16-bit ◦ Transmission speed 328 kb/s ◦ Max. range 10 m ◦ Including connection wire *not available in the EU	 GZCS HLC-2.6 Optional adapter for car specific harness Compatible with: GZCS 4.0BMW-Connect GZCS MB-Connect
---	---	---

Model specifications

GZDSP 4-8XII
High-quality 4 to 8 channel DSP
4x RCA input / 4x high-level input



General information

The advantage of the DSP technology is available as a stand-alone processor unit ready to be added to every sound system.

Features:

- 8-channel digital signal processor
- 4-channel high-level input
- 4-channel RCA input
- Realtime setup of all functions (via PC or app*)
- 2x 28-bit Analog Devices signal processor
- Simple handling, one-page graphical user interface (Windows® compatible)
- Parametric 10-band equalizer for each channel
- Time delay correction
- Variable crossover
- Phase correction
- Auto-on function available for high-level input

*(requires optional GZDSP BTS 4-8XII)



GZDSP REM 4-8XII-S
Optional wired remote control



GZDSP BTS 4-8XII
USB interface for wireless music streaming & app control

Model specifications

GZDSP 6-10PRO
High-quality 6 to 10 channel DSP
6x RCA input / 6x high-level input



General information

Lots of DSP power in a compact form factor. Since modern cars are getting equipped with huge numbers of speakers, it is necessary to be able to control all of them when implementing custom installations. With it's fully adjustable 10 channel output GZDSP 6-10PRO is ready for this mission.

Features:

- 10-channel digital signal processor
- 6-channel high-level input
- 6-channel RCA input
- Realtime setup of all functions (via PC or app)
- SigmaDSP ADAU1466 high performance processor
- Simple handling, one-page graphical user interface (Windows® compatible)
- 31-band equalizer for each channel
- Time delay correction
- Variable crossover
- Phase correction
- Auto-on function available for high-level input
- Variable ground settings
- Compact design
(only 132 x 40,5 x 143/171 mm / 5.2 x 1.59 x 5.62/6.73")



CAR SPECIFIC SERIES

Suitable Upgrade for the OEM Sound System

Most OEM audio systems lack good performance and hence, cannot satisfy the expectations of sophisticated customers. Especially the basic equipment leaves a lot of space for improvements of dynamics and sound quality. Installing car specific aftermarket loudspeakers and matching amplifiers by GROUND ZERO is a simple way to upgrade the audio system.

The CAR SPECIFIC SERIES solutions consist of various components designed for upgrading the OEM audio systems of modern cars at affordable effort and costs.

Model specifications

GZCS A-4.80
Micro sized 4-channel amplifier
4x 60/80 W RMS @ 4 / 2 Ω
2x 160 W RMS bridged @ 4 Ω



Available separately:
GZCS ISO-CONNECT
GZCS 4.0BMW-CONNECT
GZCS MB-CONNECT

General information

The micro-sized model will fit wherever space is limited.
An ISO plug'n'play harness and car specific wires are available separately.

Dimensions only 82 x 40 x 151/171 mm / 3.23 x 1.57 x 5.94 / 6.73".

CAR SPECIFIC Mono amplifier

Model specifications

GZCS A-1.650D
High-quality mono class D amplifier
1x 250/450/650 W RMS @ 4 / 2 / 1 Ω




General information

This space-saving and high-efficient mono amplifier delivers the required power for a demanding subwoofer in any system setup. Furthermore, it matches the GZDSP units perfectly.


- Features:
- Class D mono amplifier
 - High-level input with auto-on function
 - 2-channel RCA input
 - Low pass filter
 - Subsonic filter
 - Adjustable Bass Boost
 - Remote control connector



Accessories

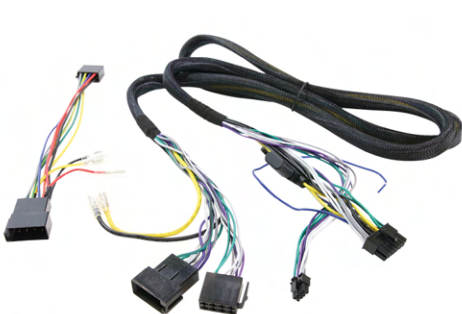

GZCS ISO-CONNECT
ISO-harness for plug'n'play installation
Compatible to GZCS A-4.80

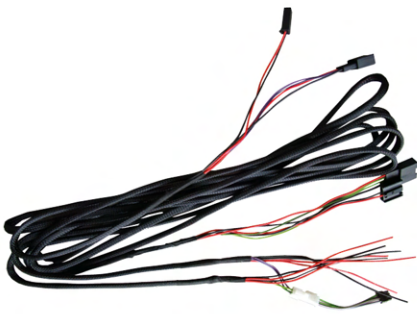

GZCS 4.0BMW-CONNECT
Used for simple and quick installation of
GZCS A-4.80 as well as GZCS DSPA-4.60ISO
in compatible BMW vehicles.



GZCS MB-CONNECT
Used for simple and quick installation of
GZCS A-4.80 as well as GZCS DSPA-4.60ISO
in compatible MB vehicles.



CAR SPECIFIC Loudspeakers

In order to upgrade the basic version of the factory-installed Mercedes-Benz audio system, specially tailored loudspeakers are available for the original slots.

- GZCS 100.2MB
- MB-specific 2-way component loudspeaker system
 - 100 mm / 4" midwoofer with high-tech cone
 - GZ-design aluminum cast basket
 - High-efficient neodymium motor
 - 25 mm / 1" silk dome tweeter
 - 12 dB/oct crossover with car-specific connector
 - Freq. response 70 Hz – 24 kHz
 - Compatible to various MB vehicles



- GZCS 100.2MB
- MB-specific 2-way component loudspeaker system
70 W RMS / 110 W max
Suitable for front and rear doors



- GZCS F-4.0MB
- Car specific 2-way coaxial speaker
60 W RMS / 100 W max
Suitable for front and rear doors
Including mounting adapters



- GZCS 100MB-S
- MB-specific wide-band surround speakers
40 W RMS / 60 W max
Freq. response 150 Hz – 14 kHz
1 pair



- GZCS 100MB-C
- MB-specific wide-band center speaker
40 W RMS / 60 W max
Freq. response 150 Hz – 14 kHz
Double voice coil / 2x 4 Ω
1 piece



- GZCS MB-CONNECT
- Plug'n'Play harness for simple installation
For GZCS A-4.80 and GZCS DSPA-4.60ISO

CAR SPECIFIC Subwoofer

General information

Additionally, the OEM woofer can be replaced by a powerful model. Due to the specific design, there are no changes to the original wiring needed. Check the compatibility chart on the GROUND ZERO web page for the appropriate product for your car model.

- Car specific subwoofer
- 110 W RMS / 220 W max
- Freq. response 30 – 1500 Hz
- 200 mm / 8" coated glass-fiber cone
- Neodymium motor
- Solid aluminum cast protection grill

Model specifications

- GZCS W-200MB.RH-R:
Driver side / right hand drive cars
- GZCS W-200MB.RH-L:
Passenger side / right hand drive cars
- GZCS W-200MB.LH-R:
Passenger side / left hand drive cars
- GZCS W-200MB.LH-L:
Driver side / left hand drive cars





CAR SPECIFIC Loudspeakers


GZCS 100.2BMW
 BMW-specific 2-way component
 loudspeaker system
 70 W RMS / 110 W max
 Including mounting adapters



In order to upgrade the basic version of the factory-installed BMW audio system, specially tailored loudspeakers are available for the original slots.

GZCS 100.2BMW

- BMW-specific 2-way component loudspeaker system
- 100 mm / 4" midwoofer with high-tech cone
- GZ-design aluminum cast basket
- High-efficient neodymium motor
- 25 mm / 1" silk dome tweeter
- 12 dB/oct crossover with car-specific connector
- Freq. response 70 Hz – 24 kHz
- Compatible with many BMW vehicles* (from 2003)
- Including mounting adapters

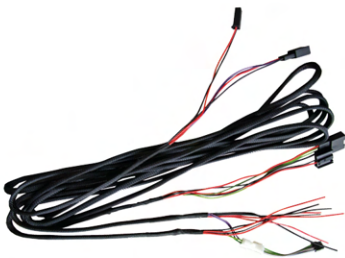

GZCS 4.0BMW-CONNECT
 Plug'n'Play harness for simple installation
 For GZCS A-4.80 and GZCS DSPA-4.60ISO



GZCS BMW-CENTER
 BMW-specific 2-way coaxial center speaker
 60 W RMS / 100 W max
 Freq. response 70 Hz – 22 kHz
 1 Piece



GZCS F-4.0BMW
 Car specific 2-way coaxial loudspeaker
 60 W RMS / 100 W max
 Freq. response 70 Hz – 22 kHz
 Including mounting adapters

*Check the latest compatibility chart at the Ground Zero web page

CAR SPECIFIC Subwoofer - BMW



Model specifications

GZCS 200BMW-SW
 Car specific under-seat subwoofer
 100 W RMS / 160 W max / 2 Ω
 Efficiency 86 dB (SPL)

GZCS 200BMW-SW4
 Car specific under-seat subwoofer
 Improved Qts for best performance
 100 W RMS / 160 W max / 4 Ω
 Efficiency 89.1 dB (SPL)

General information

Additionally to the component speaker system, GROUND ZERO offers matching subwoofers for BMW/MINI in both, 2- & 4-ohms version.

Features:

- Car specific under-seat subwoofer (1pair)
- 200 mm / 8" diameter
- Neodymium motor (2 Ω version)
- Double neodymium motor (4 Ω version)
- 50 mm / 2" copper voice coil
- Freq. response 35 - 250 Hz

CAR SPECIFIC Loudspeakers - Volkswagen T5/T6

General information	Model specifications
Made for OEM loudspeaker plug & play replacement upgrading the sound quality of Volkswagen T5 and T6 vehicles with very little installation workload.	GZCS 200.2VW-T5/T6 Car specific 2-way component system for VW T5 and VW T6 80 W RMS / 140 W max / 4 Ω Efficiency 89 dB (SPL)



CAR SPECIFIC Components - Volkswagen

Since car manufacturers used to mix OEM speakers for their line-up, many various combinations of tweeters and midwoofers are required to cover a wide range of mounting positions. For this reason, GROUND ZERO offers some separately available components which can be used in any combination for custom setups.



GZCS T-25S
Universal 25 mm / 1"
silk dome tweeter
50 W RMS / 80 W max
Freq. response 4 – 20 kHz



GZCS T-25VW
Car specific 25 mm / 1"
silk dome tweeter
50 W RMS / 80 W max
Freq. response 4 – 20 kHz
Incl. VW specific connectors




GZCS K-165VW
Car specific 165 mm / 6.5"
midwoofer
70 W RMS / 100 W max
Freq. response 50 Hz – 5 kHz
Incl. VW specific connectors and mounting adapter



GZCS K-200VW
Car specific 200 mm / 8"
midwoofer
80 W RMS / 110 W max.
Freq. response 40 Hz – 4.5 kHz
Incl. VW specific connectors

CAR SPECIFIC Speakers

General information	Model specifications
GROUND ZERO offers some car specific coaxial speaker systems matching the OEM installation positions of a variety of vehicles. Features: ◦ Car-specific coaxial loudspeakers ◦ Coated paper cone ◦ Resonance-free steel basket ◦ Rubber surround ◦ Mylar tweeter with 6 dB/oct high pass filter ◦ Wide range frequency response	GZCS 46CX 2-way coaxial loudspeaker 70 W RMS / 110 W max Flat gasket GZCS 8.7CX coaxial loudspeaker 50 W RMS / 90 W max Suitable for various vehicles GZCS 12CX 2-way coaxial loudspeaker 60 W RMS / 100 W max Suitable for Mercedes-Benz W124 

Model specifications	General information
 GZCS 10SUB Flat spare wheel subwoofer Double voice coil 2x 2 Ω Power handling 300 W	Especially the bass response of a basic OEM speaker system leaves many wishes unfulfilled. For some models, GROUND ZERO offers a simple solution that significantly increases the low frequency response. Using the spare wheel compartment, the trunk space remains untouched. This subwoofer solution is available as an active version with integrated amplifier or as a passive version. Common features: ◦ High quality spare wheel recess subwoofer ◦ Perfect solution for a flat spare wheel recess ◦ No cut-out in the original trunk floor panel required ◦ Efficient down-firing technology ◦ Solid sealed MDF enclosure with black carpet ◦ Silver logo stitch ◦ High-power 25 cm / 10" woofer
 GZCS 10SUB-ACT Flat spare wheel active subwoofer Class AB amplifier 300 W max High-Level input with auto-on	Features (ACT version): ◦ Class A/B MOSFET amplifier ◦ Adjustable bass boost ◦ Phase shift option (phase switch) ◦ Low pass filter (30 – 120 Hz) ◦ High-level input with auto-on function ◦ Remote control connector (GZTA Bassremote available separately)  GZTA Bassremote Optional remote control for GZCS 10SUB-ACT  GZST 4S 4-pin push terminal

CAR SPECIFIC Under-seat subwoofer

Model specifications	General information
 GZCS SW-800A Flat active subwoofer 20 cm / 8" driver 120 W RMS / 180 W max Including wired remote control  GZCS SW-1000A Flat active subwoofer 25 cm / 10" driver 150 W RMS / 210 W max Including wired remote control	An active subwoofer for the lower frequency response upgrades the bass performance of vehicles with small loudspeakers. GROUND ZERO offers two active under-seat models at the CAR SPECIFIC series with each a solid GZ-design aluminum cast housing. These two come with a particularly flat enclosure enabling the installer to find a place even at the most limited space under the seat. Common features: ◦ Under-seat active subwoofer ◦ Powerful amplifier ◦ High-level input with auto-on function ◦ Solid GZ-design aluminum cast housing ◦ Modest mounting height ◦ Bass boost control ◦ Adjustable low pass crossover ◦ Low current consumption ◦ Wired remote control included  GZCS Y-BOX Remote extension box to control two under-seat subwoofers simultaneously



Stop
Vibration



Higher Acoustic
Performances



Insulate
Heat

((NO VIBRATION - JUST SOUND))

Listening to favorite music is most enjoyable if there is no disturbing noise around. Unfortunately, in-car environments consist of a wide range of materials causing a lot of annoying noises. Especially large scaled body parts tend to vibrate and affect the audio reproduction of the car speakers in a negative way. GROUND ZERO damping materials offer high efficient noise proofing. They reduce vibration, increase bass response as well as dynamics and by that ensure precise audio reproduction. There are particular products for each neuralgic car part influencing the sound quality available.

DAMPING

Model specifications

GZDM DOORKIT PRO


Damping kit for 2 doors

Self-adhesive high-efficient damping material

Package content:

- 2 sheets GZDA 1200AL-GOLD
- Self-adhesive aluminum plate
- 8 sheets GZDM 3750AB-SILVER
- Polymer damping material based on butyl rubber with layer of aluminum
- 4 sheets GZDF 1500SA
- High-efficient sound absorbing polyurethane foam
- 2 sheets GZDF 400SI
- Waterproof high-density noise damping polyethylene foam

Size per sheet: 500 x 375 mm / 19.69" x 14.76"

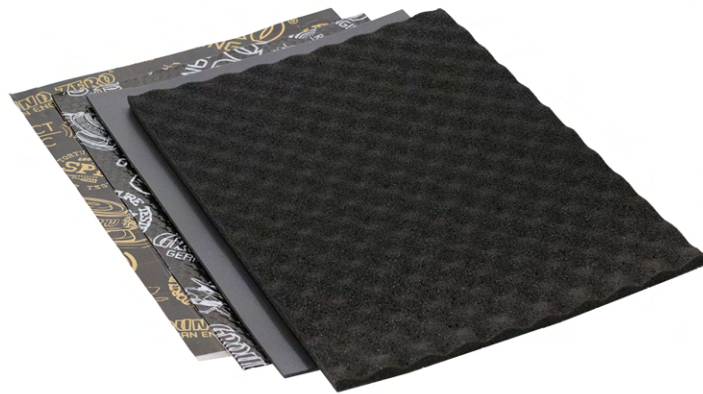


GZDF 400SI

Self-adhesive noise damping and heat insulating material.

High-density, waterproof polyethylene foam reducing standing waves inside the door panel

- Operating temperature -30° to 90° C
- Total thickness 4.0 mm / 0.158"
- Dimensions (sheet) 500 x 375 mm / 19.69" x 14.76"
- Package content 20 sheets

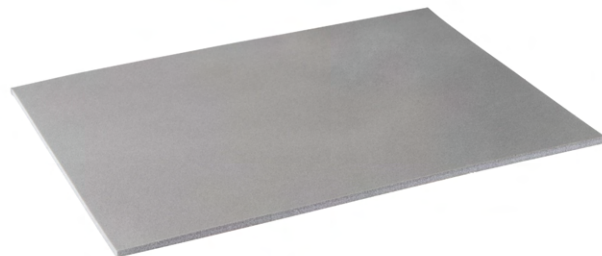

GZDF 1500SA-PRO

High-efficient viscous-elastic sound absorbing formed foam with water-repelling surface.

Self-adhesive, heat insulating and vibration damping when compressed.

- Total thickness 15 mm / 0.59"
- Noise absorbing -85%
- Dimensions (sheet) 500 x 375 mm / 19.69" x 14.76"
- Package content 8 sheets



Model specifications



Polymer based on butyl rubber, supplemented with anti-corrosive additives to ensure that the treated surface does not rust. Flexible and waterproof material providing high-effective anti-vibration damping.

GZDM 3750AB-GOLD

◦ Total Thickness	2.3 mm / 0.091"
◦ Mass (kg/m ²), at least	3.0 kg
◦ Dimensions (sheet)	750 x 500 mm / 29.53" x 19.69"
◦ Package content	10 sheets

GZDM 3750AB-SILVER

◦ Total Thickness	1.8 mm / 0.071"
◦ Mass (kg/m ²), at least	2.4 kg
◦ Dimensions (sheet)	750 x 500 mm / 29.53" x 19.69"
◦ Package content	10 sheets



GZDM 1900ML-GOLD

Flexible multi-layer damping material with polymer based on butyl rubber in combination with bitumen mastic and aluminum foil outer surface.

◦ Total Thickness	4.2 mm / 0.165"
◦ Mass (kg/m ²), at least	6.5 kg
◦ Dimensions (sheet)	500 x 375 mm / 19.69" x 14.76"
◦ Package content	10 sheets



GZDA 1200AL-GOLD

High-strength, self-adhesive aluminium plate to reduce the vibration of metal parts, e.g., door panels. Ultra-thin, temperature and water-resistant material with flame-proof properties.

◦ Total Thickness	300 µm / 0.012"
◦ Material thickness	200 µm / 0.008"
◦ Weight	0.65 kg/m ² / 60 g/ft ²
◦ Dimensions (plate)	500 x 375 mm / 19.69" x 14.76"
◦ Package content	6 sheets



GZDM 1900MC-GOLD

Bitumen saturated damping material based on viscous elastic polyurethane foam for soundproofing in combination with a layer of polymer-based butyl rubber and aluminum foil outer surface.

High-efficient soundproofing and anti-vibration damping.

◦ Total Thickness	7 mm / 0.28"
◦ Noise absorption	-85%
◦ Water absorption	<18%
◦ Dimensions (sheet)	500 x 375 mm / 19.69" x 14.76"
◦ Package content	10 sheets



GZDM 250AL-BassBoost

Self-adhesive multilayer, non-inflammable damping material with a specifically molded aluminum surface reducing the reflection of sound waves and pressure when installed directly behind the speaker.

◦ Total thickness	15 mm +/- 4 mm
◦ Dimensions (sheet)	250 x 183 mm / 9.84" x 7.20"
◦ Package content	2 sheets (for 2 doors)


ACCESSORIES

This line includes optionally available products to be used at the installation or offer additional features.

ACCESSORIES - Integration / Wiring



GZCS MB-CONNECT
Car specific wiring harness for Mercedes-Benz



GZCS 4.0BMW-CONNECT
Car specific wiring harness for BMW / MINI



GZCS ISO-CONNECT
ISO-harness for plug 'n' play installation
Compatible to GZCS A-4.80



GZCS ISO QUADLOCK I
Quadlock to ISO connector
GZCS ISO QUADLOCK II
Quadlock II to ISO connector



GZCS Y-BOX
Remote extension box to control two under-seat subwoofers simultaneously



GZDSP BTS 4-8XII
USB interface for wireless music streaming & app control



GZCV 2.0HL
Active 2-channel high to low level converter incl. 12 V remote out



GZTH 25-28B
Tweeter surface housing black rubber touch finish
Suitable for GZRT 25SQ / GZUT 28SQ

ACCESSORIES - Triple shielded RCA cables

General information

GZCC X-TP RCA cables ensure best analogue signal transmission by using selected materials and high-flexible OFC conductors, available in several, typically required lengths.

Features:

- Triple shielded, twisted RCA cable
- Gold plated brass RCA connectors
- Black & yellow coloured nylon braided hose for high mechanical protection
- Blister packaging

Model specifications

Available versions:

- GZCC 0.5X-TP: 0.5 m / 1.64 ft
- GZCC 1.0X-TP: 1.0 m / 3.28 ft
- GZCC 3.0X-TP: 3.0 m / 9.84 ft
- GZCC 5.5X-TP: 5.5 m / 18.05 ft



Model specifications

General information



GZCC 1.3X
High-quality RCA cable
1 m / 3.28 ft triple shielded
Including remote wire

Universal shielded or twisted RCA signal cables, available in different sizes.



GZCC 5.3X
High quality RCA cable
5 m / 16.4 ft triple shielded
Including remote wire



GZCC 5.1XLC
High quality twisted RCA cable
5 m / 16.4 ft single shielded



GZCY 30X
High quality Y-adapter
1x female / 2x male

ACCESSORIES - Power kits

Model specifications

General information



GZPK 50X-II
50 mm² / 0 AWG power kit
Triple shielded RCA cable
ANL fuseholder incl. 200 A fuse

Only an adequately dimensioned and need-based power wiring ensures that the best performance and highest possible power will be delivered by the amplifier.
GROUND ZERO offers amplifier wiring kits with different diameters for each power demand including an RCA signal cable.



GZPK 35X-II
35 mm² / 2 AWG power kit
Triple shielded RCA cable
ANL fuseholder incl. 150 A fuse

- High quality amplifier wiring kits
- Flexible CCA wire with copper coating
- Yellow power wire (5.2 m / 17.06 ft)
- Black ground wire (0.8 m / 2.62 ft)
- 2-channel shielded RCA cable (5 m / 16.4 ft)
- Fuse holder incl. matching fuse
- Connectors and covers



GZPK 20X-II
20 mm² / 4 AWG power kit
Triple shielded RCA cable
Mini ANL fuseholder incl. 80 A fuse


GZPK 10X-II
10 mm² / 7 AWG power kit
Triple shielded RCA cable
Mini ANL fuseholder incl. 60 A fuse

GZPK 10XLC-II (w/o picture)
10 mm² / 7 AWG power kit
Twisted RCA cable
1.5 m / 4.92 ft speaker cable
Mini ANL fuseholder incl. 60 A fuse
Remote cable

ACCESSORIES - OFC speaker cables

General information	Model specifications
In order to transport the music signal as lossless as possible from the amplifier to the loud-speaker, a high-quality and sufficiently dimensioned cable is required. Features: ◦ High quality OFC copper speaker cable ◦ Black and yellow color isolation ◦ Highly flexible ◦ Wooden spool	 Available diameters: GZSC 1.5X2 OFC: 2x 1.50 mm² - 100 m / 328.08 ft spool GZSC 2.5X2 OFC: 2x 2.50 mm² - 100 m / 328.08 ft spool GZSC 4.0X2 OFC: 2x 4.00 mm² - 75 m / 246.06 ft spool GZSC 10.0X2 OFC: 2x 10.00 mm² - 50 m / 164.04 ft spool

ACCESSORIES - CCA speaker cables

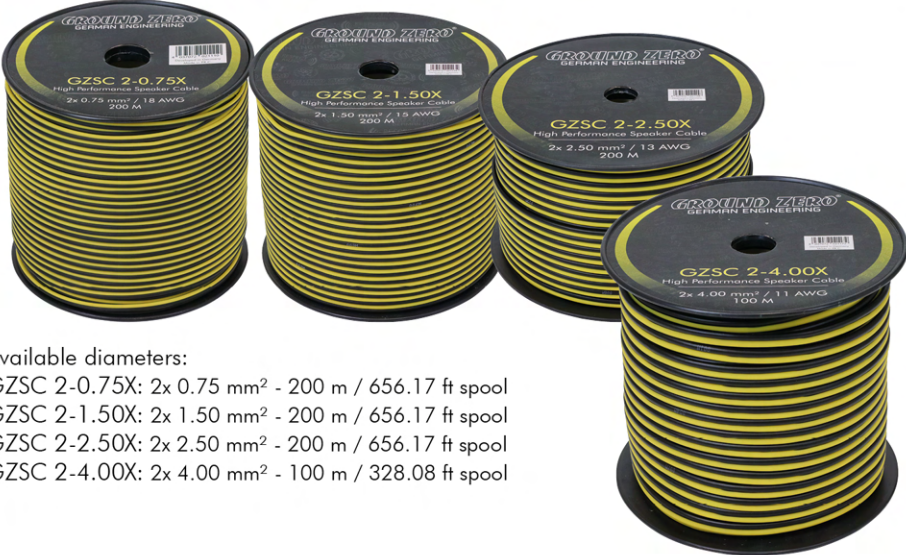General information	Model specifications
In order to transport the music signal as lossless as possible from the amplifier to the loud-speaker, a high-quality and sufficiently dimensioned cable is required. Features: ◦ High quality CCA speaker cable ◦ Black and yellow color isolation ◦ Highly flexible ◦ Plastic spool	 Available diameters: GZSC 2-0.75X: 2x 0.75 mm² - 200 m / 656.17 ft spool GZSC 2-1.50X: 2x 1.50 mm² - 200 m / 656.17 ft spool GZSC 2-2.50X: 2x 2.50 mm² - 200 m / 656.17 ft spool GZSC 2-4.00X: 2x 4.00 mm² - 100 m / 328.08 ft spool

ACCESSORIES - Power cap

General information	Model specifications
Powerful amplifiers require a stable battery voltage to deliver full performance. This power capacitor compensates the battery's voltage drops caused by high current flow.  Including mounting brackets	GZTC 1.0FX 1.0 Farad Power Cap 16 V / 20 V Surge Voltmeter with white illumination 

Model specifications

Available diameters:

GZPC 10B/Y: 10 mm² / 7 AWG - 50 m / 164.04 ft spool

GZPC 20B/Y: 20 mm² / 4 AWG - 50 m / 164.04 ft spool

GZPC 35B/Y: 35 mm² / 2 AWG - 30 m / 98.43 ft spool

GZPC 50B/Y: 50 mm² / 0 AWG - 20 m / 65.62 ft spool



General information

Only an adequately dimensioned and needs-based power wiring ensures that the best performance and highest possible power will be delivered by the installed components.

For this reason, GROUND ZERO offers highly flexible CCA power cables in all common diameters on roles.

Features:

- High quality CCA power wire
- Black/Yellow isolation
- Highly flexible
- Plastic spool


ACCESSORIES - Grills




GZPG 250B
Aluminum cast rim
with metal mesh grill
For all 25 cm / 10" subwoofers



GZ ULTRA 165-GRILL
Machined & polished aluminum
mounting rim including GZ-design
NRG hexagon style protection grill
For all 165 mm / 6.5" speakers



GZMG 165/6.5
165 mm / 6.5" Protection grill
Black chrome steel
For all 165 mm / 6.5" speakers

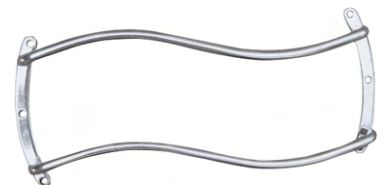

GZMG 38/15
Chrome woofer/speaker protection
for 380 mm / 15" speaker

More ACCESSORIES



GZST 2S
2-pin push terminal up to
6 mm² speaker cable



GZST 2B
2-pin push terminal up to
10 mm² speaker cable



GZST 4S
4-pin push terminal up to
6 mm² speaker cable
including bridges for parallel wiring



GZAP 70Y
High-quality custom ventilation tube
Airflow optimized tails
71 mm / 2.80" diameter
381 mm / 15.00" length

General information

GROUND ZERO offers a wide range of distribution blocks and fuseholders needed for the installation of audio components in your vehicle. Besides that, further products complete the accessory line.



GZBT 2.50MANL-POS
Positive battery terminal
with Mini-ANL fuseholder
1x 50 mm² / 0 AWG unfused
1x 50 mm² / 0 AWG fused



GZBT 2.50NEG
Negative battery terminal
2x 50 mm² / 0 AWG



GZDB 3.50/4.20
Distribution block
3x 50 mm² / 0 AWG
4x 20 mm² / 4 AWG



GZDB 4.50/8.20MANL
Distribution block
4x 50 mm² / 0 AWG
8x 20 mm² / 4 AWG



GZFH 1.20 IL-MANL
In-line Mini-ANL fuseholder
1x 20 mm² / 4 AWG



GZFH 1.20/1.20 MANL
Mini-ANL fuseholder
1x 20 mm² / 4 AWG



GZFH 1.50/1.50 ANL/MANL
ANL / Mini-ANL fuseholder
1x 50 mm² / 0 AWG



GZFH 1.50/2.20 ANL/MANL
ANL / Mini-ANL fuseholder
1x 50 mm² / 0 AWG
2x 20 mm² / 4 AWG



GZFH 3.50/4.20 ANL/MANL
ANL / Mini-ANL fuseholder
3x 50 mm² / 0 AWG
4x 20 mm² / 4 AWG



GZWR 50-20
Wire reducer
For reducing 50 mm² / 0 AWG
into 20 mm² / 4 AWG



Blister packaging

FUSES

General information

High quality ANL and MANL fuses from 40 up to 400 Ampere, available in blister or in 10 piece bulk packaging.

Model specifications

GZFU ANL (1 piece / blister)
available 100 – 400 Ampere



GZFU MANL (2 pieces / blister)
available 40 – 200 Ampere







HEADPHONES

If you would like to enjoy the typical GROUND ZERO sound not only in your vehicle, you may choose one of the two headphones. Both of them delivering a distinctive bass response and the dynamic sound character.



GZHP 10-IE
 Powerful in-ear headphone with aluminum housing
 Speaker: 10 mm
 Sensitivity: 98 ± 3 dB at 1 KHz
 Microphone sensitivity: -42 ± 4 dB
 Frequency Response: 20 Hz – 20 kHz
 Impedance: $32 \pm 15\%$ Ω
 Plug Type: 3.5 mm jack
 Cable length: 120 cm / 47"
 Weight: 15 g
 In-line microphone
 Headset function
 Accessories included



GZHP 40-OE
 High quality foldable on-ear headphone
 Speaker: 40 mm
 Sensitivity: 100 ± 3 dB at 1 KHz
 Microphone sensitivity: -43 ± 4 dB
 Frequency Response: 20 Hz – 20KHz
 Impedance: $32 \pm 15\%$ Ω
 Max Power: 30 mW
 Plug Type: 3.5 mm
 Cable length: 120 cm / 47"
 Cable: Dual side cable
 Weight: 150 g
 In-Line Mic compatible with Apple/Samsung/HTC and more



MERCHANDISE

#ShowYourGZ !

APPAREL



GZ POLOSHIRT BLACK
High Quality poloshirt
with embroidered logo on the chest
Available in sizes M / XXL



GZ POLOSHIRT WHITE
High Quality poloshirt
with embroidered logo on the chest
Available in sizes S - 2XL



GZ POLOSHIRT RED
High Quality poloshirt
with embroidered logo on the chest
Available in sizes S - XL



GZ COMPETITION SHIRT
Black/Yellow Competition shirt
GZ Logo on chest and back,
dB Drag, EMMA, AMT, IASCA logo on sleeves
Available in sizes M - 2XL



GZ SHIRT GRAPHIC
Grey shirt with stickerbomb allover print
and leather logo badge on the chest
Available in sizes S - 4XL



GZ HOODIE GRAPHIC
Grey hoodie with stickerbomb allover print
and leather logo badge on the chest
Available in sizes S - 4XL



GZ HOODIE GREY
Grey zip-hoodie with "Respect the Music" logo on the
chest, GZ logo on the back
Available in sizes XL / 2XL



GZ JACKET BLACK
High quality Engelbert Strauss Softshell
jacket with stitched GZ Logo on the chest
Available in sizes S - 2XL



GZ COMPETITION JACKET
Black/yellow jacket
Ground Zero logo on the chest and back, waterproof
and breathable
Available in sizes M - 2XL



GZ CAP BLACK
Black cap with embroidered GZ
Logo on side and back

Unisize



GZ CAP YELLOW
Black/Yellow trucker cap with
embroidered logo and logo badge

Unisize



GZ CAP GREY
Grey/Green cap
with logo badge

Unisize



GZ BEANIE
Grey beanie with
GZ logo on leather badge

Unisize



GZ SUNGLASSES WHITE/BLACK
with GZ logo, UV 400 protection

Available as white or black
version



GZ BADGEHOLDER
with stitched Ground Zero logos

Available as green, yellow or red
version



GZ BRACELET SET
Silicone bracelets with logo,
set of 10 bracelets
Available as green/grey or
yellow/black version



GZ PIN
Soft enamel pin with GZ logo
circa 15 mm height

ACCESSORIES



GZ EAR PROTECT - AL
SaveRave earprotection in yellow / black
including band, in aluminum container with GZ
logo




GZ PEN
Black-Yellow ballpoint pen with Ground Zero logo



GZ LIGHTER
Black GO lighter with yellow
GZ logoprint



GZ LOGO
Metal emblem with GZ logo

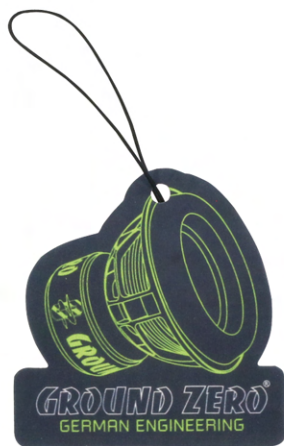

GZ CAR FRESHENER
Car freshener in GZ design,
72,5 x 75,5 mm / 2.85" x 2.97"
Available as:
GZ Car freshener-AQ („Aquarelle“) or
GZ Car freshener-GT („Green Tea“)



GZ ENERGY SPL
Energydrink in 250 ml Ground Zero can



GZ STICKER GZ
Plott-sticker with silver GZ letters

Available as:
GZ Sticker Short GZ (325 x 45 mm / 12.80" x 1.77")
GZ Sticker Silver GZ (800 x 100 mm / 31.5" x 3.94")


GZ STICKER SILVER
Plott-sticker with silver logo and GZ letters

Available as:
GZ Sticker Silver-S (150 x 67 mm / 5.91" x 2.64")
GZ Sticker Silver-L (470 x 187 mm / 18.5" x 7.36")

GZ STICKER GZ-GE
Plott-sticker with silver / red GZ letters
396 x 83 mm / 15.59" x 3.27"



GZ FLAG
120 x 300 cm / 47.24" x 118.11"
including PVC hooks and 25 mm hemstitch
GZ FLAG SMALL
60 x 150 cm / 23.62" x 59.06"
including PVC hooks and 25 mm / 1" hemstitch

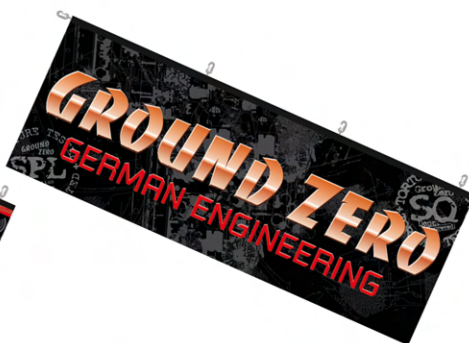

GZ FLAG SQ
120 x 300 cm / 47.24" x 118.11"
including PVC hooks and 25 mm / 1" hemstitch



GZ POSTERSET
Posterset including 3 „Desert Movie“ posters
80 x 60 cm / 31.5" x 23.62" each

Technical product information		
	Amplifiers	74
	DSP amplifiers	74
	Active subwoofers	75
	Subwoofer enclosures	75
	Speaker systems	76
	Coaxial speakers	77
	Kickwoofer / Midwoofer / Midrange / Fullrange speakers	78
	Tweeters	79
	Subwoofers	80



Amplifiers & DSP Amplifiers

Series

Product	Output power @ 4/2/1 Ohm	Bridged max @ 4/2 Ohm (link mode)	LPF	HPF / *Subsonic	BP	Bass- boost	Phase- shift	Remote	Line Out	High- level & auto-on	Dimensions (mm/inch)
GZ ULTRA A-2	2x 200/330/450 W	1x 1200 W max									250 x 80 x 502 9.84 x 3.15 x 19.76"
GZPA Reference 2 Pure	2x 420/750/1150 W	1x 1800/2700 W max									236 x 68 x 590 mm 9.29 x 2.67 x 23.23"
GZPA Reference 4 Pure-SQ	4x 150/270/425 W	2x 650/1000 W max									236 x 67,5 x 590 mm 9.29 x 2.66 x 23.23"
GZPA 2SQ	2x 175/315/500 W	1x 630/1000 W max	✓	✓	✓	✓	✓				222 x 61 x 420 mm 8.74 x 2.40 x 16.54"
GZPA 4SQ	4x 125/225/350 W	2x 450/700 W max	✓	✓	✓	✓					222 x 60,5 x 420 mm 8.74 x 2.38 x 16.54"
GZUA 2SQ	2x 170/300/450 W	1x -/1080 W max	✓	✓	✓	✓	✓	✓	✓		209 x 47 x 360 mm 8.23 x 1.81 x 14.17"
GZUA 4SQ	4x 115/185/- W	2x 440/- W max	✓	✓	✓						209 x 47 x 360 mm 8.23 x 1.81 x 14.17"
GZUA 6SQ	4x 110/160/- & 2x 150/270/- W	2x 380 W + 650 W @ 4 ohms max	✓	✓	✓						209 x 47 x 550 mm 8.23 x 1.81 x 21.65"
GZHA MINI ONE	1x 220/390/630 W	1x 1500 W max @ 2 ohms (linkmode)	✓	Subsonic	✓	✓	✓	✓	✓	✓	135 x 52 x 210 mm 5.32 x 2.05 x 8.27"
GZHA MINI ONE-K	1x 340/600/1000 W	1x 2300 W max @ 2 ohms (linkmode)	✓	Subsonic	✓	✓	✓	✓	✓	✓	135 x 52 x 322 mm 5.32 x 2.05 x 12.68"
GZHA MINI ONE-K 24V	1x 340/600/1000 W	1x 2300 W max @ 2 ohms (linkmode)	✓	Subsonic	✓	✓	✓	✓	✓	✓	135 x 52 x 322 mm 5.32 x 2.05 x 12.68"
GZHA MINI TWO	2x 130/230/- W	1x 550 W max @ 4 ohms	✓	✓	✓		✓	✓	✓	✓	135 x 52 x 210 mm 5.32 x 2.05 x 8.27"
GZHA MINI FOUR	4x 80/130/- W	2x 320 W max @ 4 ohms	✓	✓	✓		✓			✓	135 x 52 x 210 mm 5.32 x 2.05 x 8.27"
GZHA MINI FOUR 24V	4x 80/130/- W	2x 320 W max @ 4 ohms	✓	✓	✓		✓			✓	135 x 52 x 210 mm 5.32 x 2.05 x 8.27"
GZHA MINI FIVE	4x 75/125/- W & 1x 190/320/500 W	2x 300 W + 600 W max @ 4 ohms	✓	✓	✓			✓		✓	135 x 52 x 322 mm 5.32 x 2.05 x 12.68"
GZHA MINI FIVE-DSP	4x 75/125/- W & 1x 190/320/500 W		DSP					optional		✓	135 x 52 x 322 mm 5.32 x 2.05 x 12.68"
GZRA 2HD	2x 285/450/- W	1x 1150 W max @ 4 ohms	✓	✓	✓	✓		optional		✓	186 x 52 x 229 mm 7.32 x 2.05 x 10.55"
GZRA 4HD	4x 175/275/- W	2x 700 W max @ 4 ohms	✓	✓	✓					✓	186 x 52 x 268 mm 7.32 x 2.05 x 10.55"
GZTA 2255X-B	2x 150/250/- W	1x 600 W max @ 4 ohm	✓	✓	✓	✓		✓			230 x 53 x 396 mm 9.06 x 2.09 x 16.34"
GZTA 4125X-B	4x 90/130/- W	2x 320 W max @ 4 ohm	✓	✓	✓	✓					230 x 53 x 396 mm 9.06 x 2.09 x 15.59"
GZTA 4230X-B	4x 140/230/- W	2x 550 W max @ 4 ohm	✓	✓	✓	✓					230 x 53 x 476 mm 9.06 x 2.09 x 18.74"
GZIA 1.700	1x 230/400/630 W		✓	✓	✓	✓		✓		✓	192 x 49 x 332 mm 7.56 x 1.93 x 13.07"
GZIA 1.2000D	1x 750/1300/1800 W		✓			✓	✓	✓		✓	192 x 49 x 382 mm 7.56 x 1.93 x 15.04"
GZIA 1.1500D	1x 425/775/1300 W		✓			✓	✓	✓		✓	192 x 49 x 360 mm 7.56 x 1.93 x 14.17"
GZIA 1.1150D	1x 370/665/1050 W		✓			✓	✓	✓		✓	192 x 49 x 302 mm 7.56 x 1.93 x 11.89"
GZIA 2.135	2x 85/135/- W	1x 300 W max @ 4 ohms	✓	✓				optional		✓	192 x 49 x 214 mm 7.56 x 1.93 x 8.43"
GZIA 2.240	2x 150/240/- W	1x 550 W max @ 4 ohms	✓	✓				optional		✓	192 x 49 x 284 mm 7.56 x 1.93 x 11.18"
GZIA 2.85	2x 60/85/- W	1x 200 W max @ 4 ohms	✓	✓						✓	192 x 49 x 174 mm 7.56 x 1.93 x 6.85"
GZIA 4.120	4x 70/120/- W	2x 275 W max @ 4 ohms	✓	✓						✓	192 x 49 x 284 mm 7.56 x 1.93 x 11.18"
GZCA 500.Q1	4x 185/315/450 W	2x 1150 W max @ 2 ohms	✓	✓	✓	✓		✓			230x67x225/270 mm 9.06x2.64x 8.86/10.63"
GZCA 1500.M1	1x - /900/1350 W		✓	✓	✓	✓		✓	✓		230 x 67 x 145 mm 9.06 x 2.64 x 5.7"
GZCA 1500.M2	1x 900/1350/- W		✓	✓	✓	✓		✓	✓		230 x 67 x 145 mm 9.06 x 2.64 x 5.7"
GZCA 3000.M1	1x - /1600/2600 W		✓	✓	✓	✓		✓	✓		230 x 67 x 220 mm 9.06 x 2.64 x 8.66"
GZCA 3000.M2	1x 1600/2600/- W		✓	✓	✓	✓		✓	✓		230 x 67 x 220 mm 9.06 x 2.64 x 8.66"
GZCA 6000.M1	1x 1850/3250/5000 W		✓	✓	✓	✓		✓	✓		230 x 67 x 265/302 mm 9.06x2.64x10.43/11.89"
GZCA 8500.M1	1x 2800/5000/8100 W		✓	✓	✓	✓		✓	✓		230 x 67 x 487 mm 9.06 x 2.64 x 19.17"



Amplifiers & DSP Amplifiers

Series

Product	Output power @ 4/2/1 Ohm	Bridged max @ 4/2 Ohm (link mode)	LPF	HPF / *Subsonic	BP	Bass-boost	Phase-shift	Remote	Line Out	High-level & auto-on	Dimensions (mm/inch)
GZCS A-1.650D	1x 250/450/650 W		✓	✓	✓	✓	✓	✓		✓	185 x 47 x 148 mm 7.28 x 1.85 x 5.83"
GZCS A-4.80	4x 60/80/- W	2x 160 W RMS @ 4 ohms	✓	✓						✓	82 x 10 x 171 mm 3.32 x 1.57 x 6.73"
GZCS DSPA-4.60ISO	4x 45/60/- W		DSP					optional	4 Ch	✓	160 x 52 x 136 mm 6.30 x 2.05 x 5.35"
GZDSP 4.80A-PRO	4x 80/130/- W	2x 260 W RMS @ 4 ohms	DSP					optional	4 Ch	✓	185 x 42 x 237 mm 7.28 x 1.77 x 9.33"
GZDSP 4-8XII			DSP					optional	8 Ch	✓	169 x 27 x 116 mm 6.65 x 1.06 x 4.57"
GZDSP 6-10PRO			DSP					optional	10 Ch	✓	132 x 40.5 x 43/171 mm 5.20 x 1.59 x 5.63/6.73"
GZBA 1.300X (included in GZ Bass Kit 12.300X-II)	1x 200 W RMS @ 4 ohms 1x 300 W max @ 4 ohms		✓	✓	✓	✓	✓	✓		✓	180 x 53 x 236 mm 7.09 x 2.09 x 9.29"



Active Subwoofers

Series

Product	Woofer	Type	Enclosure	Dimensions (mm/inch)	Lowpass	Bass remote	Output power
GZIB 20BR-ACT	200 mm / 8"	Front-Basstunnel vented	MDF 17 L / 0.6 ft³	400 x 270 x 305 (245 mm) / 15.75 x 10.63 x 12.01 (9.65")	30 - 120 Hz	optional	120 / 220 W
GZIB 25BR-ACT	250 mm / 10"	Front-Basstunnel vented	MDF 33 L / 1.17 ft³	440 x 360 x 320 (285 mm) / 17.32 x 14.17 x 12.60 (11.22")	30 - 120 Hz	optional	150 / 270 W
GZIB 30BR-ACT	300 mm / 12"	Front-Basstunnel vented	MDF 37 L / 1.31 ft³	460 x 370 x 400 (310 mm) / 18.11 x 14.57 x 15.75 (12.20")	30 - 120 Hz	optional	180 / 300 W
GZCS SW-800A	200 mm / 8"	Under-seat subwoofer	Aluminum cast	300 (315) x 235 x 80 mm / 11.81 (12.40) x 9.25 x 3.15"	50 - 150 Hz	✓	120 / 180 W
GZCS SW-1000A	250 mm / 10"	Under-seat subwoofer	Aluminum cast	350 (365) x 270 x 80 mm / 13.78 (14.37) x 10.63 x 3.15"	50 - 150 Hz	✓	150 / 210 W
GZCS 10SUB-ACT	250 mm / 10"	Spare wheel recess	MDF 15 L / 0.53 ft³	620 x 440 x 120 (153 mm incl. feet) / 24.4 x 17.32 x 4.72 (6.02" incl. feet)	30 - 120 Hz	optional	300 W max



Subwoofer Enclosures

Series

Product	Woofer	Type	Net. Volume	Dimensions (mm/inch)	Impedance	Power handling	Recommended amplifier power
GZCS 10SUB	250 mm / 10"	Sealed	15 L / 0.53 ft³	620 x 440 x 120 (153 mm incl. feet) / 24.4 x 17.32 x 4.72 (6.02" incl. feet)	2 x 2 Ω	160 W RMS / 300 W max	150 - 300 W
GZUB 8BR	200 mm / 8"	Airflow-optimized vented	20.5 L / 0.72 ft³	430 x 250 x 318 (265 mm) / 16.93 x 9.84 x 12.52 (10.43")	2 x 2 Ω	300 W RMS	200 - 400 W
GZUB 10BR	250 mm / 10"	Airflow-optimized vented	30 L / 1.06 ft³	460 x 320 x 327 (255 mm) / 18.11 x 12.60 x 12.87 (10.04")	2 x 2 Ω	450 W RMS	300 - 600 W
GZUB 12BR	300 mm / 12"	Airflow-optimized vented	42 L / 1.48 ft³	520 x 380 x 358 (260 mm) / 20.47 x 14.96 x 14.09 (10.24")	2 x 2 Ω	600 W RMS	400 - 800 W
GZRB 16SPL	165 mm / 6.5"	Basstunnel vented	8.5 L / 0.3 ft³	410 x 280 x 130 mm / 16.14 x 11.02 x 5.12"	2 x 2 Ω	350 W RMS / 700 W SPL	250 - 700 W
GZRB 20SPL	200 mm / 8"	Airflow-optimized vented	21 L / 0.74 ft³	440 x 240 x 280 mm / 17.32 x 9.45 x 11.02"	2 x 2 Ω	500 W RMS / 1000 W SPL	400 - 1000 W
GZRB 25SPL	250 mm / 10"	Airflow-optimized vented	28 L / 0.99 ft³	480 x 305 x 280 mm / 18.9 x 12.0 x 11.02"	2 x 2 Ω	500 W RMS / 1000 W SPL	400 - 1000 W
GZRB 30SPL	300 mm / 12"	Front-Basstunnel vented	66.6 L / 2.35 ft³	650 x 380 x 450 (330 mm) / 25.59 x 14.96 x 17.72 (12.99")	2 x 2 Ω	700 W RMS / 1350 W SPL	500 - 1200 W
GZIB 20BR	200 mm / 8"	Front-Basstunnel vented	17 L / 0.6 ft³	400 x 270 x 290 (230 mm) / 15.75 x 10.63 x 11.42 (9.06")	4 Ω	150 W RMS	100 - 200 W
GZIB 25BR	250 mm / 10"	Front-Basstunnel vented	33 L / 1.17 ft³	440 x 320 x 360 (285 mm) / 17.32 x 12.30 x 14.17 (11.22")	4 Ω	250 W RMS	200 - 300 W
GZIB 30BR	300 mm / 12"	Front-Basstunnel vented	37 L / 1.31 ft³	460 x 370 x 400 (310 mm) / 18.11 x 14.57 x 15.75 (12.20")	4 Ω	350 W RMS	200 - 400 W
GZIB 2.30BR	2x 300 mm / 2x 12"	Front-Basstunnel vented	70 L / 2.47 ft³	815 x 370 x 400 (310 mm) / 32.09 x 14.57 x 15.75 (12.20")	2 x 2 Ω	700 W RMS	400 - 800 W
GZIB 12SPL	300 mm / 12"	Front-Basstunnel vented	45 L / 1.59 ft³	560 x 380 x 360 (260 mm) / 22.05 x 14.96 x 14.17 (10.24")	2 x 2 Ω	500 W RMS / 1000 W SPL	300 - 1000 W
GZIB 2.12SPL	2x 300 mm / 2x 12"	Front-Basstunnel vented	90 L / 3.54 ft³	840 x 400 x 430 (310 mm) / 33.07 x 15.75 x 16.93 (12.2")	4 x 2 Ω	1000 W RMS / 2000 W SPL	600 - 1400 W
GZ BASS KIT 12.300X-II	300 mm / 12"	Airflow-optimized vented	40 L / 1.41 ft³	520 x 360 x 350 (250 mm) / 20.47 x 14.17 x 13.78 (9.84")	4 Ω	300 W RMS	200 - 500 W



Speaker Systems

Series

	Product	Nominal Ø	Mounting Ø	Depth	Tweeter	Midwoofer	Frequency range	Impedance	Power handling RMS/MAX
	GZUC 165.2SQ	165 mm / 6.5"	144 mm / 5.67"	63 mm / 2.48"	GZUT 28SQX	GZUK 165SQ	40 Hz - 25 kHz	4 Ω	140 / 230 W
	GZUC 165.2SQ-ACT	165 mm / 6.5"	144 mm / 5.67"	63 mm / 2.48"	GZUT 28SQX	GZUK 165SQ	40 Hz - 25 kHz	4 / 4 Ω	120 / 200 W + 80 / 120 W (Tw)
	GZUC 165.3SQ	165 mm / 6.5" 55 mm / 2.17"	144 mm / 5.67" 64.5 mm / 2.54"	63 mm / 2.48" 33 mm / 1.30"	GZUT 28SQX	GZUK 165SQ & GZUM 55SQ	40 Hz - 25 kHz	4 Ω	160 / 250 W
	GZUC 165.3SQ-ACT	165 mm / 6.5" 55 mm / 2.17"	144 mm / 5.67" 64.5 mm / 2.54"	63 mm / 2.48" 33 mm / 1.30"	GZUT 28SQX	GZUK 165SQ & GZUM 55SQ	40 Hz - 25 kHz	4 / 4 / 4 Ω	120 / 200 W + 90 / 150 W + 80 / 120 W (Tw)
	GZHC 165.2	165 mm / 6.5" 55 mm / 2.17"	144 mm / 5.67" 64.5 mm / 2.54"	69 mm / 2.72" 33 mm / 1.30"	GZHT 25S	GZHK 165	40 Hz - 24 kHz	4 / 4 Ω	130 / 220 W
	GZRC 165.2SQ	165 mm / 6.5"	142.5 mm / 5.61"	68 mm / 2.68"	GZRT 25SQ	GZRK 165SQ	35 Hz - 25 kHz	3 Ω	120 / 190 W
	GZRC 165.2SQ-IV	165 mm / 6.5"	142.5 mm / 5.61"	68 mm / 2.68"	GZRT 25SQ	GZRK 165SQ	35 Hz - 25 kHz	3 Ω	120 / 190 W
	GZRC 165.3SQ	165 mm / 6.5"	142.5 mm / 5.61"	68 mm / 2.68"	GZRT 25SQ	GZRK 165SQ	35 Hz - 25 kHz	3 Ω	160 / 250 W
	GZRC 165.3SQ-ACT	165 mm / 6.5"	142.5 mm / 5.61"	68 mm / 2.68"	GZRT 25SQ	GZRK 165SQ & GZRM 80SQ	35 Hz - 25 kHz	3 / 4 / 4 Ω	110 / 160 W + 50 / 80 W + 70 / 110 W (Tw)
	GZTC 130.2X	130 mm / 5.12"	117.5 mm / 4.61"	61 mm / 2.40"	GZTT 20S	HQPP cone with 3D-structure	60 Hz - 22 kHz	3 Ω	80 / 130 W
	GZTC 165.2X	165 mm / 6.5"	142.5 mm / 5.61"	68 mm / 2.68"	GZTT 20S	GZTK 165	50 Hz - 22 kHz	3 Ω	100 / 150 W
	GZTC 165.3X-II	165 mm / 6.5" 100 mm / 4"	142.5 mm / 5.61" 94 mm / 3.70"	68 mm / 2.68" 32 mm / 1.26"	GZTT 20S	GZTK 165 & GZTM 100NEO	50 Hz - 22 kHz	3 Ω	120 / 180 W
	GZTC 165.3X-ACT	165 mm / 6.5" 100 mm / 4"	142.5 mm / 5.61" 94 mm / 3.70"	68 mm / 2.68" 32 mm / 1.26"	19 mm / 0.75" soft dome	GZTK 165 & GZTM 100NEO	50 Hz - 22 kHz	3 / 3 / 4 Ω	80 / 110 W + 40 / 50 W + 30 / 40 W (Tw)
	GZIC 130.2	130 mm / 5.25"	117.5 mm / 4.61"	58 mm / 2.28"	19 mm / 0.75" soft dome	HQPP cone with 3D-structure	60 Hz - 20 kHz	4 Ω	90 / 140 W
	GZIC 165.2	165 mm / 6.5"	142.5 mm / 5.61"	68 mm / 2.68"	19 mm / 0.75" soft dome	HQPP cone with 3D-structure	50 Hz - 20 kHz	4 Ω	100 / 150 W
	GZIC 400FX	100 mm / 4"	93 mm / 3.66"	30 mm / 1.18"	19 mm / 0.75" soft dome	Coated paper cone	70 Hz - 20 kHz	4 Ω	60 / 100 W
	GZIC 650FX	165 mm / 6.5"	142.5 mm / 5.61"	44 mm / 1.73"	19 mm / 0.75" soft dome	Coated paper cone	50 Hz - 20 kHz	4 Ω	100 / 140 W
	GZIC 165.2SPL	165 mm / 6.5"	142.5 mm / 5.61"	68 mm / 2.68"	25 mm / 1.0" Mylar dome	GZIK 165SPL	45 Hz - 20 kHz	3 Ω	120 / 200 W
	GZCC 165.2SQL	165mm / 6.5"	145 mm / 5.7"	71.5 mm / 2.81"	GZCT 25SQL	GZCK 165XSPL	50 Hz - 22 kHz	4 Ω	160 / 300 W
	GZCC 200.2SQL	200 mm / 8"	183 mm / 7.2"	86 mm / 3.39"	GZCT 25SQL	GZCK 200XSPL	50 Hz - 22 kHz	4 Ω	200 / 380 W
	GZCS 100.2MB	100 mm / 4"	Car Specific	Car Specific	25 mm / 1.0" coated silk dome	Kevlar cone	70 Hz - 25 kHz	4 Ω	70 / 100 W
	GZCS 100.2BMW	100 mm / 4"	Car Specific	Car Specific	25 mm / 1.0" coated silk dome	Kevlar cone	70 Hz - 25 kHz	4 Ω	70 / 100 W
	GZCS 200.2VW-T5/T6	200 mm / 8"	Car Specific	Car Specific	28 mm / 1.1" silk dome	Carbon cone	40 Hz - 20 kHz	4 Ω	80 / 140 W

Series	Coaxial Speakers								
	Product	Nominal Ø	Mounting Ø	Depth	Tweeter	Midwoofer	Frequency range	Impedance	Power handling RMS/MAX
	GZRF 4.0SQ	100 mm / 4"	93 mm / 3.66"	47 mm / 1.85"	19 mm / 0.51" silk dome	Black aluminum cone	70 Hz - 24 kHz	3 Ω	70 / 110 W
	GZRF 5.2SQ	130 mm / 5.25"	117.5 mm / 4.63"	59 mm / 2.32"	19 mm / 0.51" silk dome	Black aluminum cone	60 Hz - 24 kHz	3 Ω	80 / 120 W
	GZRF 6.5SQ	165 mm / 6.5"	142.5 mm / 5.61"	68 mm / 2.68"	19 mm / 0.51" silk dome	Black aluminum cone	50 Hz - 24 kHz	3 Ω	100 / 140 W
	GZRF 69SQ	150 x 230 mm / 6 x 9"	152 x 214 mm / 5.98 x 8.4"	82 mm / 3.23"	13 mm / 0.51" PEI & 50 mm / 2" PEI midrange	Black aluminum cone	40 Hz - 24 kHz	3 Ω	130 / 200 W
	GZTF 4.0X	100 mm / 4"	93 mm / 3.66"	51 mm / 2.01"	13 mm / 0.51" Mylar	HQPP cone with 3D structure	70 Hz - 22 kHz	3 Ω	70 / 100 W
	GZTF 5.2X	130 mm / 5.25"	117.5 mm / 4.63"	62 mm / 2.44"	13 mm / 0.51" Mylar	HQPP cone with 3D structure	60 Hz - 22 kHz	3 Ω	80 / 110 W
	GZTF 6.5X	165 mm / 6.5"	143.5 mm / 5.65"	67 mm / 2.64"	13 mm / 0.51" Mylar	HQPP cone with 3D structure	50 Hz - 22 kHz	3 Ω	90 / 130 W
	GZTF 69X	150 x 230 mm / 6 x 9"	152 x 214 mm / 5.98 x 8.4"	85 mm / 3.35"	13 mm / 0.51" Mylar & 55 mm / 2.2" midrange	HQPP cone with 3D structure	40 Hz - 22 kHz	3 Ω	130 / 190 W
	GZIF 4001FX	100 mm / 4"	93 mm / 3.66"	30 mm / 1.18"	13 mm / 0.51" Mylar	Coated paper cone	80 Hz - 20 kHz	4 Ω	50 / 90 W
	GZIF 5201FX	130 mm / 5.25"	117.5 mm / 4.63"	37 mm / 1.46"	13 mm / 0.51" Mylar	Coated paper cone	70 Hz - 20 kHz	4 Ω	60 / 100 W
	GZIF 6501FX	165 mm / 6.5"	142.5 mm / 5.61"	44 mm / 1.73"	13 mm / 0.51" Mylar	Coated paper cone	60 Hz - 20 kHz	4 Ω	70 / 110 W
	GZIF 4.0	100 mm / 4"	93 mm / 3.66"	48 mm / 1.89"	13 mm / 0.51" Mylar	HQPP cone with 3D structure	70 Hz - 20 kHz	4 Ω	60 / 100 W
	GZIF 5.2	130 mm / 5.25"	117,5 mm / 4.63"	56 mm / 2.20"	13 mm / 0.51" Mylar	HQPP cone with 3D structure	60 Hz - 20 kHz	4 Ω	70 / 110 W
	GZIF 6.5	165 mm / 6.5"	142,5 mm / 5.61"	63 mm / 2.48"	13 mm / 0.51" Mylar	HQPP cone with 3D structure	50 Hz - 20 kHz	4 Ω	80 / 120 W
	GZIF 69	150 x 230 mm / 6 x 9"	152 x 214 mm / 5.98 x 8.40"	83 mm / 3.27"	13 mm / 0.51" Mylar & 50 mm / 2" midrange	HQPP cone with 3D structure	40 Hz - 20 kHz	4 Ω	120 / 180 W
	GZCF 6.5SPL	165 mm / 6.5"	145 mm / 5.7"	72 mm / 2.83"	25 mm / 1" Mylar tweeter	Fiber reinforced paper cone	50 Hz - 20 kHz	4 Ω	100 / 250 W
	GZCF 8.0SPL	200 mm / 8"	183 mm / 7.2"	87 mm / 3.43"	25 mm / 1" Mylar tweeter	Fiber reinforced paper cone	40 Hz - 20 kHz	4 Ω	150 / 300 W
	GZCF 69SPL	150 x 230 mm / 6 x 9"	152 x 214 mm / 5.98 x 8.40"	84 mm / 3.31"	25 mm / 1" Mylar tweeter	Fiber reinforced paper cone	50 Hz - 20 kHz	4 Ω	150 / 300 W
	GZCF 165NEO-PRO	165 mm / 6.5"	147 mm / 5.79"	86 mm / 3.39"	25 mm / 1" PEI compression tweeter	Coated paper cone	150 Hz - 20 kHz	4 Ω + 4 Ω	150 + 50 / 300 + 100 W
	GZCF 200NEO-PRO	200 mm / 8"	check manual	check manual	25 mm / 1" PEI compression tweeter	Coated paper cone	130 Hz - 20 Hz	4 Ω + 4 Ω	250 + 50 / 400 + 100 W
	GZCF 6.5SPL-NEO	165 mm / 6.5"	145 mm / 5.71"	68 mm / 2.68"	28 mm / 1.1" Mylar	Fiber reinforced paper cone	70 Hz - 20 kHz	4 Ω	100 / 250 W
	GZCF 7104XSPL	180 x 250 mm / 7 x 10"	152 x 214 mm / 5.98 x 8.4"	86 mm / 3.39"	13 mm / 0.51" PEI & 13mm / 0.51" piezoelectric 50 mm / 2" papercone midrange	Fiber reinforced paper cone	35 Hz - 25 kHz	4 Ω	200 / 300 W
	GZCS 12CX	120 mm / 4.7"	109 mm / 4.29"	50 mm / 1.97"	13 mm / 0.51" Mylar	Coated paper cone	75 Hz - 20 kHz	4 Ω	60 / 100 W
	GZCS 46CX	100 x 150 mm / 4 x 6"	Car specific	48 mm / 1.89"	13 mm / 0.51" Mylar	Coated paper cone	80 Hz - 20 kHz	4 Ω	70 / 110 W
	GZCS 8.7CX	87 mm / 3.43"	Car specific	43 mm / 1.69"	13 mm / 0.51" Mylar	Coated paper cone	100 Hz - 20 kHz	4 Ω	50 / 90 W
	GZCS 100MB-C	100 mm / 4"	91 mm / 3.58"	37 mm / 1.46"	n/a	Kevlar cone	100 Hz - 17 kHz	4 Ω + 4 Ω	50 / 90 W
	GZCS 100MB-S							4 Ω	
	GZCS F-4.0MB	100 mm / 4"	94 mm / 3.70"	39 mm / 1.54"	20 mm / 0.79" silk dome	Kevlar cone	70 Hz - 22 kHz	4 Ω	60 / 100 W
	GZCS F-4.0BMW								
	GZCS BMW-CENTER	Car specific	94 mm / 3.70"	39 mm / 1.54"	20 mm / 0.79" silk dome	Kevlar cone	70 Hz - 22 kHz	4 Ω	60 / 100 W
	GZRM 165X	165 mm / 6.5"	142.5 mm / 5.61"	62 mm / 2.44"	13 mm / 0.51" Mylar	IMPP cone	60 Hz - 25 kHz	4 Ω	70 / 120 W



Kickwoofer / Midwoofer / Midrange Speakers

Series

Product	Nominal Ø	Mounting Ø	Depth	Voice coil Ø	Cone	FS	QTS	VAS	Frequency range	Impedance	Power handling RMS/MAX
GZ ULTRA M-80	80 mm / 3.15"	77 mm / 3.03"	41 mm / 1.61"	20 mm / 0.79"	Carbon-fleece sandwich type	tba	tba	tba	tba	4 Ω	tba
GZ ULTRA K-165	165 mm / 6.5"	147 mm / 5.79"	67 mm / 2.64"	34 mm / 1.34"	Carbon-fleece sandwich type	43 Hz	0.51	20.4 L / 0.72 ft³	45 Hz - 5 kHz	4 Ω	100 / 160 W
GZPF 40SQX	40 mm / 1.57"	48 mm / 1.89"	39 mm / 1.54"	16 mm / 0.63"	Anodized aluminum	440 Hz	n/a	n/a	600 Hz - 24 kHz	4 Ω	50 / 80 W
GZPM 80SQ-C	80 mm / 3.15"	77 mm / 3.03"	39 mm / 1.54"	20 mm / 0.79"	Ceramics-coated aluminum	100 Hz	0.29	1.5 L / 0.052 ft³	150 Hz - 4 kHz	4 Ω	70 / 110 W
GZPK 165SQ-C	165 mm / 6.5"	144 mm / 5.67"	70 mm / 2.76"	40 mm / 1.57"	Ceramics-coated aluminum	38 Hz	0.41	27.9 L / 0.98 ft³	40 Hz - 5 kHz	4 Ω	140 / 200 W
GZNM 80SQ-K	80 mm / 3.15"	77 mm / 3.03"	39 mm / 1.54"	20 mm / 0.79"	Kevlar	97 Hz	0.39	1.66 L / 0.06 ft³	150 Hz - 4 kHz	4 Ω	70 / 110 W
GZNK 165SQ-K	165 mm / 6.5"	144 mm / 5.67"	70 mm / 2.76"	40 mm / 1.57"	Kevlar	43 Hz	0.48	24.13 L / 0.85 ft³	40 Hz - 5 kHz	4 Ω	130 / 190 W
GZUM 55SQ	55 mm / 2.2"	64.5 mm / 2.54"	33 mm / 1.29"	55 mm / 2.17"	Precision-coated silk dome	353 Hz	n/a	n/a	500 Hz - 11 kHz	4 Ω	90 / 150 W
GZUF 60SQ-A	60 mm / 2.36"	61 mm / 2.4"	36 mm / 1.42"	25 mm / 1"	Anodized aluminum	150 Hz	0.64	0.5 L / 0.18 ft³	300 Hz - 20 kHz	4 Ω	50 / 80 W
GZUM 80SQ	80 mm / 3.15"	76.5 mm / 3.01"	35 mm / 1.38"	25 mm / 1"	Anodized aluminum	134 Hz	0.34	0.7 L / 0.024 ft³	200 Hz - 6 kHz	4 Ω	50 / 80 W
GZUK 165SQ	165 mm / 6.5"	144 mm / 5.67"	61 mm / 2.40"	50 mm / 2"	Anodized aluminum	54.6 Hz	0.64	12.6 L / 0.44 ft³	40 Hz - 3.5 kHz	4 Ω	120 / 180 W
GZHK 165	165 mm / 6.5"	144 mm / 5.67"	69 mm / 2.72"	38 mm / 1.5"	Non-pressed paper	49.4 Hz	0.49	15.9 L / 0.56 ft³	40 Hz - 5 kHz	4 Ω	120 / 180 W
GZHM 80	80 mm / 3.15"	77 mm / 3.03"	41 mm / 1.61"	20 mm / 0.79"	Non-pressed paper	106 Hz	0.30	1.5 L / 0.052 ft³	170 Hz - 5 kHz	4 Ω	50 / 80 W
GZRM 80SQ	80 mm / 3.15"	76.5 mm / 3.01"	34 mm / 1.34"	25 mm / 1"	Anodized aluminum	114 Hz	0.38	1.5 L / 0.052 ft³	140 Hz - 4 kHz	4 Ω	50 / 80 W
GZRK 165SQ	165 mm / 6.5"	142.5 mm / 5.61"	68 mm / 2.68"	25 mm / 1"	Anodized aluminum	60.1 Hz	0.65	11.5 L / 0.41 ft³	35 Hz - 4 kHz	3 Ω	110 / 160 W
GZTM 100NEO	100 mm / 4"	94 mm / 3.7"	32 mm / 1.26"	25 mm / 1"	HQPP	127.8 Hz	1.77	1.8 l / 0.06 ft³	250 Hz - 7 kHz	3 Ω	40 / 60 W
GZTK 165	165 mm / 6.5"	142.5 mm / 5.61"	68 mm / 2.68"	25 mm / 1"	HQPP with 3D structure	81.6 Hz	0.94	7.27 L / 0.26 ft³	50 Hz - 4 kHz	3 Ω	80 / 100 W
GZIK 165SPL	165 mm / 6.5"	142.5 mm / 5.61"	68 mm / 2.68"	25 mm / 1"	HQPP with 3D structure	61.5 Hz	0.84	11.12 L / 0.39 ft³	45 Hz - 4 kHz	3 Ω	80 / 120 W
GZCM 6.5N-PROX	165 mm / 6.5"	147 mm / 5.79"	63 mm / 2.48"	38 mm / 1.5"	Paper (water repellent)	143 Hz	0.36	2.8 L / 0.10 ft³	180 Hz - 12 kHz	4 Ω	200 / 400 W
GZCM 8.0N-PROX	165 mm / 6.5"	181 mm / 7.12"	82 mm / 3.23"	63 mm / 2.5"	Paper (water repellent)	90 Hz	0.21	10.1 L / 0.36 ft³	120 Hz - 7 kHz	4 Ω	300 / 500 W
GZCM 6.5NEO-DC	165 mm / 6.5"	143 mm / 5.63"	65 mm / 2.56"	38 mm / 1.5"	Fiber-reinforced paper	133.2 Hz	0.37	4.09 L / 0.14 ft³	240 Hz - 12 kHz	4 Ω	120 / 320 W
GZCM 8.0NEO-DC	200 mm / 8"	182 mm / 7.17"	76 mm / 2.99"	38 mm / 1.5"	Fiber-reinforced paper	123.3 Hz	0.43	7.57 L / 0.27 ft³	160 Hz - 7 kHz	4 Ω	180 / 420 W
GZCM 6.5SPL	165 mm / 6.5"	143 mm / 5.63"	72 mm / 2.83"	38 mm / 1.5"	Reinforced paper	189.4 Hz	0.96	1.9 L / 0.067 ft³	220 Hz - 10 kHz	4 Ω	100 / 300 W
GZCM 8.0SPL	200 mm / 8"	182 mm / 7.17"	87 mm / 3.43"	38 mm / 1.5"	Reinforced paper	90.6 Hz	0.58	17.2 L / 0.607 ft³	140 Hz - 10 kHz	4 Ω	150 / 400 W
GZCM 10.0SPL	250 mm / 10"	231 mm / 9.09"	98 mm / 3.86"	50 mm / 2"	Reinforced paper	76.2 Hz	0.65	31 L / 1.095 ft³	100 Hz - 10 kHz	4 Ω	200 / 500 W
GZCK 165XSPL	165 mm / 6.5"	145 mm / 5.7"	72 mm / 2.83"	38 mm / 1.5"	Reinforced paper	56.8 Hz	0.31	16.2 L / 0.57 ft³	50 Hz - 10 kHz	4 Ω	100 / 250 W
GZCK 200XSPL	200 mm / 8"	183 mm / 7.2"	86 mm / 3.39"	38 mm / 1.5"	Reinforced paper	54.3 Hz	0.38	31.2 L / 1.10 ft³	50 Hz - 6 kHz	4 Ω	150 / 300 W
GZCK 250XSPL	250 mm / 10"	235 mm / 9.25"	110 mm / 4.33"	50 mm / 2"	Reinforced paper	44 Hz	0.41	43.6 L / 1.54 ft³	40 Hz - 6 kHz	4 Ω	200 / 400 W
GZCW 12-75SPL	300 mm / 12"	282 mm / 11.1"	133 mm / 5.24"	75 mm / 3"	Reinforced paper	42.2 Hz	0.27	71.9 L / 2.54 ft³	40 Hz - 3 kHz	4 Ω	400 / 800 W
GZCS K-165VW	165 mm / 6.5"	142 mm / 5.59"	62 mm / 2.44"	38 mm / 1.5"	Coated paper	60 Hz	0.61	11.4 L / 0.40 ft³	50 Hz - 5 kHz	3 Ω	70 / 110 W
GZCS K-200VW	200 mm / 8"	180 mm / 7.10"	70 mm / 2.76"	38 mm / 1.5"	Coated paper	48 Hz	0.61	30.3 L / 1.01 ft³	40 Hz - 4.5 kHz	3 Ω	80 / 110 W

Series	Tweeters									
	Product	Outer Ø incl. frame	Mounting Ø incl. frame	Mounting depth	Voice coil Ø	Dome	FS	Frequency range	Impedance	Power handling RMS/MAX
	GZ ULTRA T-30	76 mm / 2.99"	60 mm / 2.36"	41 mm / 1.61"	30 mm / 1.18"	Soft dome	500 Hz	1 - 26 kHz	4 Ω	100 / 150 W
	GZPT 28SQ	54 mm / 2.13"	48 mm / 1.89"	35 mm / 1.38"	28 mm / 1.1"	Coated silk	770 Hz	2 - 30 kHz	4 Ω	100 / 150 W
	GZNT 28SQ	53 mm / 2.09"	48 mm / 1.89"	29 mm / 1.14"	28 mm / 1.1"	Coated silk	990 Hz	2 - 25 kHz	4 Ω	90 / 140 W
	GZUT 28SQX	54 mm / 2.13"	48 mm / 1.89"	18 mm / 0.70"	28 mm / 1.1"	Coated silk	1300 Hz	2.5 - 25 kHz	4 Ω	80 / 130 W
	GZHT 25S	54 mm / 2.13"	48 mm / 1.89"	22 mm / 0.87"	25 mm / 1"	Coated silk	1400 Hz	2.2 - 24 kHz	4 Ω	70 / 110 W
	GZRT 25SQ	54 mm / 2.13"	48 mm / 1.89"	16 mm / 0.63"	25 mm / 1"	Coated silk	1550 Hz	3 - 25 kHz	4 Ω	70 / 110 W
	GZTT 20S	54 mm / 2.13"	46 mm / 1.81"	18 mm / 0.70"	20 mm / 0.79"	Coated silk	1700 Hz	3 - 22 kHz	4 Ω	40 / 70 W
	GZCS T-25S	39.5 mm / 1.56" w/o frame	44 mm / 1.73"	22 mm / 0.87"	25 mm / 1"	Soft dome	1460 Hz	4 - 20 kHz	4 Ω	50 / 80 W
	GZCS T-25VW	VW specific	VW specific	VW specific	25 mm / 1"	Soft dome	1460 Hz	4 - 20 kHz	4 Ω	50 / 80 W

Series	Competition & Competition PRO Tweeters								
	Product	Outer Ø w/o frame	Mounting Ø	Mounting depth	Voice coil Ø	Dome	Frequency range	Impedance	Power handling RMS/MAX
	GZCT 0500X	58 mm / 2.28"	43 mm / 1.69"	43 mm / 1.69"	25 mm / 1"	Aluminum	4 - 25 kHz	4 Ω	30 / 100 W
	GZCT 500IV-B	58 mm / 2.28"	43 mm / 1.69"	37 mm / 1.46"	25 mm / 1"	Aluminum	4 - 25 KHz	4 Ω	30 / 100 W
	GZCT 19N-PROX (B/S)	83 x 67 mm / 3.27 x 2.64"	60 x 46 / 2.36 x 1.81"	48 mm / 1.89"	25 mm / 1"	Polyamide	3 - 22 kHz	4 Ω	30 / 100 W
	GZCT 25SQL	75 mm / 2.95"	50 mm / 1.97"	36 mm / 1.42"	25 mm / 1"	Coated silk	3 - 22 kHz	4 Ω	100 / 150 W
	GZCT 3000X	102 x 102 mm / 4.02 x 4.02"	90 mm / 3.54"	66 mm / 2.6"	38 mm / 1.5"	Aluminum	4 - 25 KHz	4 Ω	40 / 120 W
	GZCT 3500X (B/S)	98 mm / 3.86"		40 mm / 1.57"	25 mm / 1"	Aluminum	3 - 25 kHz	4 Ω	30 / 100 W
	GZCT 4000X	160 x 120 mm / 6.3 x 4.7"	128 x 88 / 5 x 3.46"	87 mm / 3.43"	44.5 mm / 1.75"	Aluminum	2.5 - 20 kHz	4 Ω	50 / 140 W
	GZCT 5000SPL (-B)	200 x 150 mm / 8 x 5.9"	165 x 130 / 6.5 x 5.12"	142 mm / 5.59"	44.5 mm / 1.75"	Titanium	1.5 - 20 kHz	4 Ω	70 / 180 W
	GZCT 25M-SPL	54 mm / 2.13"	48 mm / 1.89"	16 mm / 0.63"	25 mm / 1"	Mylar	3 - 20 kHz	4 Ω	70 / 100 W
	GZCT 28M-SPL	54 mm / 2.13"	48 mm / 1.89"	16 mm / 0.63"	28 mm / 1.1"	Mylar	2.5 - 20 kHz	4 Ω	80 / 110 W

	Product	Outer Ø	Mounting Ø	Depth	Voice coil Ø	Cone	FS	QTS	VAS	Impedance	Power handling	Recommended amplifier power
	GZPW Reference 250	275 mm / 10.8"	235 mm / 9.25"	128 mm / 5.04"	35 mm / 1.38"	Reinforced paper	31.3 Hz	0.50	36.5 L / 1.29 ft³	2 x 2 Ω	500 W RMS	300 - 600 W
	GZPW 10SQ	259 mm / 10.20"	236 mm / 9.29"	148 mm / 5.83"	50 mm / 2"	Aluminum	34 Hz	0.58	23.5 L / 0.83 ft³	2 x 2 Ω	400 W RMS	400 - 700 W
	GZPW 15NEO-SPL-LTD	391 mm / 15.39"	358 mm / 14.09"	307 mm / 12.09"	100 mm / 4"	Carbon fiber (mixed)	41.2 Hz	0.19	25.6 L / 0.9 ft³	2 x 1 Ω	3000 W RMS	2000 - 10000 W
	GZPW 15Xmax	392 mm / 15.43"	358 mm / 14.09"	297 mm / 11.69"	100 mm / 4"	Aluminum	31.6 Hz	0.40	27.0 L / 0.95 ft³	2 x 1 Ω	6000 W RMS	4000 - 8000 W
	GZNW 30SPL-D1	315 mm / 12.4"	281 mm / 11.06"	237 mm / 9.33"	75 mm / 3"	Reinforced paper	38.6 Hz	0.38	23.6 L / 0.83 ft³	2 x 1 Ω	3000 W RMS / 6000 W SPL	2000 - 6000 W
	GZNW 30SPL-D2	315 mm / 12.4"	281 mm / 11.06"	237 mm / 9.33"	75 mm / 3"	Reinforced paper	41.3 Hz	0.54	25.0 L / 0.88 ft³	2 x 2 Ω	3000 W RMS / 6000 W SPL	2000 - 6000 W
	GZNW 38SPL-D1	392 mm / 15.43"	358 mm / 14.09"	269 mm / 10.59"	75 mm / 3"	Reinforced paper	36 Hz	0.52	54 L / 1.91 ft³	2 x 1 Ω	3500 W RMS / 7000 W SPL	3000 - 7000 W
	GZNW 38SPL-D2	392 mm / 15.43"	358 mm / 14.09"	269 mm / 10.59"	75 mm / 3"	Reinforced paper	36.5 Hz	0.61	63 L / 2.22 ft³	2 x 2 Ω	3500 W RMS / 7000 W SPL	3000 - 7000 W
	GZNW 15NEO-EXTREME	392 mm / 15.43"	358 mm / 14.09"	300 mm / 11.81"	75 mm / 3"	Carbon fiber	36.2 Hz	0.15	20.7 L / 0.73 ft³	2 x 1 Ω	3000 W RMS / 6000 W SPL	2000 - 6000 W
	GZNW 12X-D2	314 mm / 12.36"	282 mm / 11.1"	210 mm / 8.27"	75 mm / 3"	Aluminum	21.8 Hz	0.33	35.0 L / 1.24 ft³	2 x 2 Ω	2000 W RMS / 3500 W SPL	1500 - 3500 W
	GZNW 12SPL-Xflex	314 mm / 12.36"	284 mm / 11.18"	226 mm / 8.9"	75 mm / 3"	Reinforced paper	33.9 Hz	0.36	27.3 L / 0.96 ft³	2 x 1 Ω	2500 W RMS / 4500 W SPL	1500 - 4500 W
	GZNW 12Xmax	314 mm / 12.36"	282 mm / 11.1"	250 mm / 9.84"	75 mm / 3"	Aluminum	35.6 Hz	0.61	13.6 L / 0.48 ft³	2 x 1 Ω	3000 W RMS	2000 - 4000 W
	GZNW 15Xmax	392 mm / 15.43"	358 mm / 14.09"	285 mm / 11.22"	75 mm / 3"	Aluminum	29.5 Hz	0.33	35.7 L / 1.26 ft³	2 x 1 Ω	4000 W RMS	3000 - 5000 W
	GZUW 8SQ-D2	215 mm / 8.46"	181 mm / 7.13"	108 mm / 4.25"	50 mm / 2"	Reinforced paper	56.9 Hz	0.69	4.8 L / 0.17 ft³	2 x 2 Ω	300 W RMS	200 - 400 W
	GZUW 10SQ-D2	262 mm / 10.31"	236 mm / 9.29"	148 mm / 5.83"	50 mm / 2"	Reinforced paper	40.2 Hz	0.54	21.8 L / 0.77 ft³	2 x 2 Ω	450 W RMS	300 - 600 W
	GZUW 12SQ-D2	315 mm / 12.4"	281 mm / 11.06"	150 mm / 5.91"	50 mm / 2"	Reinforced paper	39.8 Hz	0.67	39.4 L / 1.39 ft³	2 x 2 Ω	600 W RMS	400 - 800 W
	GZHW 16SPL	177 mm / 6.97"	153 mm / 6.02"	110 mm / 4.33"	50 mm / 2"	Reinforced paper	51 Hz	0.46	2.8 L / 0.10 ft³	2 x 2 Ω	500 W RMS / 1000 W SPL	400 - 1000 W
	GZHW 20XSPL -D1	211 mm / 8.31"	187 mm / 7.36"	143 mm / 5.65"	63 mm / 2.5"	Reinforced paper	38.9 Hz	0.55	5.2 L / 0.18 ft²	2 x 1 Ω	700 W RMS / 1500 W SPL	500 - 1500 W
	GZHW 20XSPL -D2	211 mm / 8.31"	187 mm / 7.36"	143 mm / 5.65"	63 mm / 2.5"	Reinforced paper	42.4 Hz	0.63	4.3 L / 0.15 ft²	2 x 2 Ω	700 W RMS / 1500 W SPL	500 - 1500 W
	GZHW 25XSPL-D1	274 mm / 10.79"	238 mm / 9.37"	178 mm / 7"	63 mm / 2.5"	Reinforced paper	40.3 Hz	0.52	9.9 L / 0.35 ft³	2 x 1 Ω	1200 W RMS / 2500 W SPL	800 - 2500 W
	GZHW 25XSPL-D2	274 mm / 10.79"	238 mm / 9.37"	178 mm / 7"	63 mm / 2.5"	Reinforced paper	40.1 Hz	0.58	12.7 L / 0.45 ft³	2 x 2 Ω	1200 W RMS / 2500 W SPL	800 - 2500 W
	GZHW 30XSPL-D1	315 mm / 12.4"	284 mm / 11.18"	198 mm / 7.8"	75 mm / 3"	Reinforced paper	39.1 Hz	0.56	17.6 L / 0.62 ft³	2 x 1 Ω	1500 W RMS / 3000 W SPL	1000 - 3000 W
	GZHW 30XSPL-D2	315 mm / 12.4"	284 mm / 11.18"	198 mm / 7.8"	75 mm / 3"	Reinforced paper	42.4 Hz	0.60	16.9 L / 0.60 ft³	2 x 2 Ω	1500 W RMS / 3000 W SPL	1000 - 3000 W
	GZHW 38XSPL-D1	390 mm / 15.35"	360 mm / 14.17"	231 mm / 9.09"	75 mm / 3"	Reinforced paper	43.4 Hz	0.77	22.19 L / 0.78 ft³	2 x 1 Ω	2000 W RMS / 3500 W SPL	1500 - 3500 W
	GZHW 38XSPL-D2	390 mm / 15.35"	360 mm / 14.17"	231 mm / 9.09"	75 mm / 3"	Reinforced paper	39.0 Hz	0.65	35.04 L / 1.24 ft³	2 x 2 Ω	2000 W RMS / 3500 W SPL	1500 - 3500 W
	GZHW 8SPL-D2 FLAT	211 mm / 8.31"	187 mm / 7.36"	80 mm / 3.15"	50 mm / 2"	Sandwich paper	31.5 Hz	0.41	14.2 L / 0.50 ft³	2 x 2 Ω	500 W RMS / 800 W SPL	350 - 800 W
	GZHW 10SPL-D2 FLAT	274 mm / 10.79"	238 mm / 9.37"	103 mm / 4.06"	63 mm / 2.5"	Sandwich paper	35.5 Hz	0.43	19.7 L / 0.70 ft³	2 x 2 Ω	600 W RMS / 1000 W SPL	400 - 1000 W
	GZHW 12SPL-D2 FLAT	315 mm / 12.40"	284 mm / 11.18"	118 mm / 4.65"	63 mm / 2.5"	Sandwich paper	21.0 Hz	0.30	117.5 L / 4.15 ft³	2 x 2 Ω	700 W RMS / 1200 W SPL	500 - 1200 W
	GZRW 25-D2	257 mm / 10.12"	228 mm / 8.98"	151 mm / 5.94"	63 mm / 2.5"	Reinforced paper	26.3 Hz	0.54	28.3 L / 1.0 ft³	2 x 2 Ω	600 W RMS	300 - 900 W
	GZRW 30-D2	311 mm / 12.24"	288 mm / 11.34"	166 mm / 6.54"	75 mm / 3"	Reinforced paper	25.7 Hz	0.50	31.2 L / 1.10 ft³	2 x 2 Ω	800 W RMS	600 - 1200 W
	GZRW 38-D2	390 mm / 15.35"	359 mm / 14.1"	195 mm / 7.68"	75 mm / 3"	Reinforced paper	22.9 Hz	0.50	110.4 L / 3.90 ft³	2 x 2 Ω	1000 W RMS	800 - 1400 W
	GZRW 250-D2 FLAT	257 mm / 10.12"	232 mm / 9.13"	85 mm / 3.35"	50 mm / 2"	Sandwich paper	28.0 Hz	0.54	35.8 L / 1.26 ft³	2 x 2 Ω	400 W RMS	300 - 500 W
	GZRW 300-D2 FLAT	312 mm / 12.28"	278 mm / 10.94"	93 mm / 3.66"	50 mm / 2"	Sandwich paper	23.5 Hz	0.44	60.2 L / 2.13 ft³	2 x 2 Ω	450 W RMS	350 - 550 W
	GZRW 6XSPL	169 mm / 6.65"	147 mm / 5.79"	99 mm / 3.9"	50 mm / 2"	Reinforced paper	49.5 Hz	0.58	2.2 L / 0.08 ft³	2 x 2 Ω	350 W RMS / 700 W SPL	300 - 700 W
	GZRW 8XSPL	209 mm / 8.23"	182 mm / 7.17"	133 mm / 5.24"	50 mm / 2"	Reinforced paper	45.8 Hz	0.36	7.4 L / 0.26 ft³	2 x 2 Ω	500 W RMS / 1000 W SPL	400 - 1000 W
	GZRW 10XSPL	257 mm / 10.12"	228 mm / 8.98"	140 mm / 5.51"	63 mm / 2.5"	Reinforced paper	44.3 Hz	0.75	9.0 L / 0.32 ft³	2 x 2 Ω	800 W RMS / 1200 W SPL	600 - 1200 W
	GZRW 12XSPL	311 mm / 12.24"	288 mm / 11.34"	166 mm / 6.54"	75 mm / 3"	Reinforced paper	31.8 Hz	0.68	27.2 L / 0.96 ft³	2 x 2 Ω	1000 W RMS / 1500 W SPL	800 - 1500 W
	GZRW 15XSPL	387 mm / 15.24"	358 mm / 14.09"	186 mm / 7.09"	75 mm / 3"	Reinforced paper	34.1 Hz	0.59	63.3 L / 2.24 ft³	2 x 2 Ω	1200 W RMS / 1800 W SPL	1000 - 1800 W

Series	Subwoofers											
	Product	Outer Ø	Mounting Ø	Depth	Voice coil Ø	Cone	FS	QTS	VAS	Impedance	Power handling	Recommended amplifier power
	GZTW 10F (Improved Q)	260 mm / 10.12"	232 mm / 9.13"	88 mm / 3.46"	50 mm / 2"	IMPP	45.1 Hz	0.56	24.1 L / 0.85 ft³	2 x 2 Ω	300 W RMS	150 - 450 W
	GZTW 12F	313 mm / 12.32"	284 mm / 11.18"	97.5 mm / 3.84"	50 mm / 2"	IMPP	35.1 Hz	0.53	53.2 L / 1.88 ft³	2 x 2 Ω	350 W RMS	200 - 500 W
	GZIW 10XSPL-D2	257 mm / 10.12"	230 mm / 9.06"	147 mm / 5.79"	63 mm / 2.5"	Reinforced paper with 3D structure	36.2	0.61	15.4 L / 0.54 ft³	2 x 2 Ω	500 W RMS / 700 W SPL	400 - 700 W
	GZIW 12XSPL-D2	310 mm / 12.2"	285 mm / 11.22"	162 mm / 6.38"	63 mm / 2.5"	Reinforced paper with 3D structure	32.5 Hz	0.73	40.4 L / 1.43 ft³	2 x 2 Ω	600 W RMS / 1000 W SPL	500 - 1000 W
	GZIW 165	168 mm / 6.6"	147 mm / 5.79"	79 mm / 3.11"	38 mm / 1.5"	HQPP with 3D structure	41.0 Hz	0.41	9.1 L / 0.32 ft³	4 Ω	100 W RMS	60 - 150 W
	GZIW 200	211 mm / 8.3"	182 mm / 7.17"	100 mm / 3.94"	38 mm / 1.5"	HQPP with 3D structure	32 Hz	0.44	23.6 L / 0.83 ft³	4 Ω	150 W RMS	100 - 200 W
	GZIW 250	257 mm / 10.12"	230 mm / 9.06"	129 mm / 5.1"	50 mm / 2"	HQPP with 3D structure	27 Hz	0.44	49.3 L / 1.74 ft³	4 Ω	250 W RMS	200 - 300 W
	GZIW 300	310 mm / 12.2"	287 mm / 11.3"	149 mm / 5.87"	50 mm / 2"	HQPP with 3D structure	30 Hz	0.58	69.3 L / 2.45 ft³	4 Ω	350 W RMS	200 - 400 W
	GZCS W-200MB	Car specific	Car specific	Car specific	38 mm / 1.5"	Coated carbon fiber	52 Hz	0.53	16.9 L / 0.60 ft³	4 Ω	110 WRMS	50 - 150 W
	GZCS 200BMW-SW	Car specific	Car specific	Car specific	50 mm / 2"	Pressed paper	55.2 Hz	1.05	20.1 L / 0.71 ft³	2 Ω	100 WRMS	80 - 160 W
	GZCS 200BMW-SW4	Car specific	Car specific	Car specific	50 mm / 2"	Pressed paper	57.9 Hz	0.67	21.3 L / 0.75 ft³	4 Ω	100 WRMS	80 - 160 W



Listening to music can be emotional, impressive, relaxing or enjoyable.
At that, it doesn't really matter what kind of music is the personal favorite,
whether it's Instrumental, Jazz, Electro, Latin, Classic, Rock or any other music direction.

However, audio reproduction quality at each desired volume is elementary.
Some music styles require higher levels while others prefer the soft tones.

GROUND ZERO considers all the different wishes of customers during
the development of new products.

Along with this, the target is to create the most realistic sound,
to transfer the soul of the music and the intention of the performer.

RESPECT THE MUSIC!



Check out www.ground-zero-audio.com
for all information on GROUND ZERO!



Follow „GROUND ZERO Official Fanpage“
together with more than 1.000.000 people
from around the world!
#ShowYourGZ

